

Contents:

- HS11 Hand Strap
- Strap Cover * 2
- M3 Captive Screw * 2



Quick Installation Guide

Elo M60 Hand Strap (HS11)

Revision A
P/N E733176

Elo Technical Support

Online self-help: www.elotouch.com/support

America

800-ELO-TOUCH
Tel +1 408 597 8000
elosales.na@elotouch.com

Europe (EMEA)

Tel +32 (0)16 70 45 00
emea.sales@elotouch.com

Asia Pacific

Tel +86 (21) 3329 1385
www.elotouch.com.cn

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Elo and the Elo logo are either trademarks or registered trademarks of Elo Touch Solutions, Inc..






- 1 Hand Strap
- 2 Strap Cover
- 3 M3 Captive Screw

Hand Strap Installation

1. Align and insert the strap pin into the hole on the M60 as shown below.
2. Tighten the screw clockwise. (Do not overtighten screws)

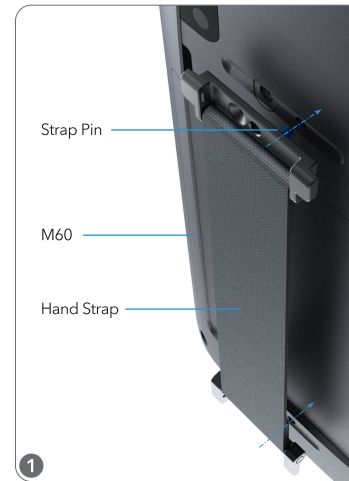

3. Align the cover pin with the hole on the hand strap.
4. Press down the strap cover on the top and bottom.

