


Box Contents:

- 1x Elo Backpack with mounting bracket attached
- 1x 12v DC power brick
- 2x AC plug adaptors



www.elotouch.com

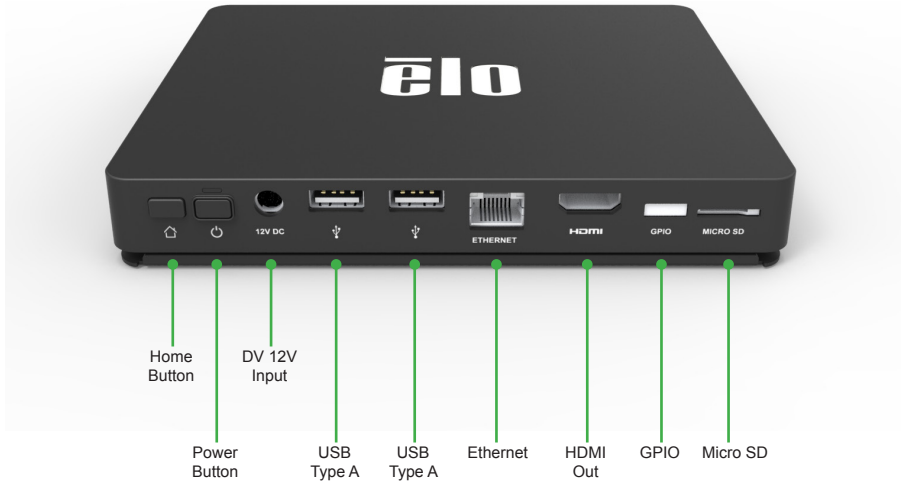

Quick Installation Guide

Elo Backpack

Elo Touch Solutions Technical Support

Online self-help:
www.elotouch.com/support

North America

800-ELO-TOUCH
Tel +1 408 597 8000
Fax +1 408 597 8050
EloSales.NA@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385
Fax +86 (21) 3329 1400
EloAsia@elotouch.com

Europe

Tel +32 (0)16 70 45 00
Fax +32 (0)16 70 45 49
elosales@elotouch.com

Latin America

Tel +52 55 2281-6958
EloSales.LATAM@elotouch.com

Revision A
P/N E214674

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Elo (logo) and Elo Touch Solutions are trademarks of Elo and its Affiliates.



Step 1 - Optional Step for Permanent Mounting

Remove the four mounting screws on the side to access the mounting bracket holes. There is a 75mm x 75mm and 100mm x 100mm mounting hole pattern included on mounting bracket. Mount the bracket to a wall or desk using M4 or #8 machine/wood screws (not included). This bracket can also be used to mount the device to the VESA mount on rear of many Elo open-frame touch monitors.



Additional mounting bracket options available as part of accessory bracket kit P/N E802593.



Low-profile mounting brackets




IDS 02- Series mounting brackets

Step 2 - Connecting device to touch monitor

- Connect 12V DC Power cable
- Connect USB cable from Elo touch monitor to one of the USB Type A connections
- Connect HDMI cable between Elo touch monitor and HDMI Out connection
- Press the Power button to power on the Elo Backpack

Step 3 - Connect device to network

After powering on the Elo Backpack, the Network screen on the control panel will appear if no wired connection is found. Set up your wireless network. Note: The control panel can be opened any time by pressing the HOME and POWER keys simultaneously, and typing in a password. The default password is *1elo*.

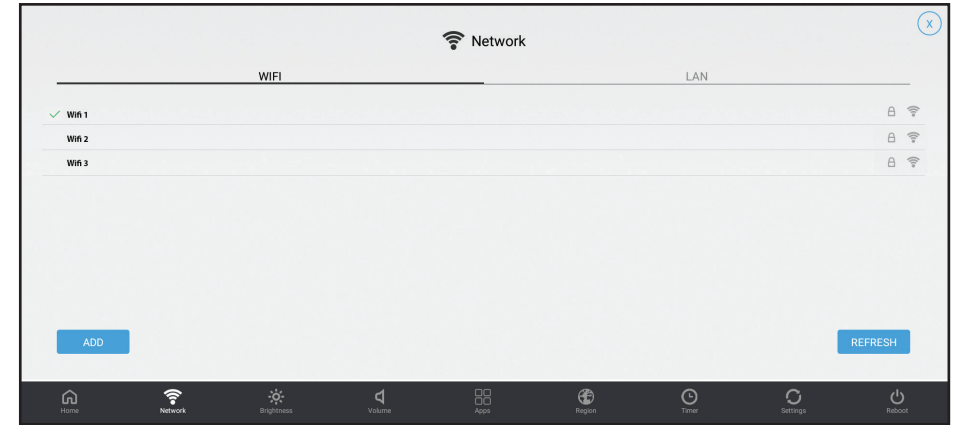

Step 4 - Add device to EloView®

To add your device to your EloView account, go to the EloView web portal at manage.eloview.com. After logging in, go to the 'Devices' page, then click the 'add device' button. Enter the device serial number and a name for the device. Click 'done'. Your device is now linked to your EloView account and will play the assigned content in safe kiosk mode. You can also pre-set your devices in your account. Visit www.eloview.com for details.

