

Kit contents:



1x

4x  m4x14mm

4x  m4x8mm

1x VGA cable, 1x USB, and, 1x USB Y cable

The logo for Elo Touch Solutions, consisting of the word "elo" in a bold, lowercase, sans-serif font. A blue horizontal bar is positioned above the letter "o".

www.elotouch.com

Quick Installation Guide

Rear facing mount for ESX-X Series

Elo Touch Solutions Technical Support

Online self-help:
www.support.elotouch.com

North America

800-ELO-TOUCH
Tel +1 408 597 8000
Fax +1 408 597 8050
EloSales.NA@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385
Fax +86 (21) 3329 1400
EloAsia@elotouch.com

Europe

Tel +32 (0)16 70 45 00
Fax +32 (0)16 70 45 49
elosales@elotouch.com

Latin America

Tel 786-923-0251
Fax 305-931-0124
EloSales.LATAM@elotouch.com

Revision B
P/N E039173

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.


Elo (logo) and Elo Touch Solutions are trademarks of Elo and its Affiliates.




Remove stand cover using coin or other tool. Remove the two screws holding the rear portion of the stand cover on and remove the cover.



Place pole mount on back of stand and align the screw holes. Install the (4) M4x14 screws to fasten the stand and then replace the cover.

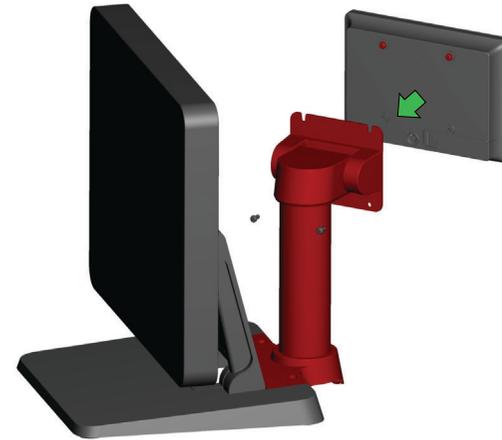

Partially install (2) M4x8mm screws on top of monitor leaving gap to hang monitor on slots of mount plate. Install the other (2) M4x8mm screws on bottom of monitor and tighten all 4 screws.

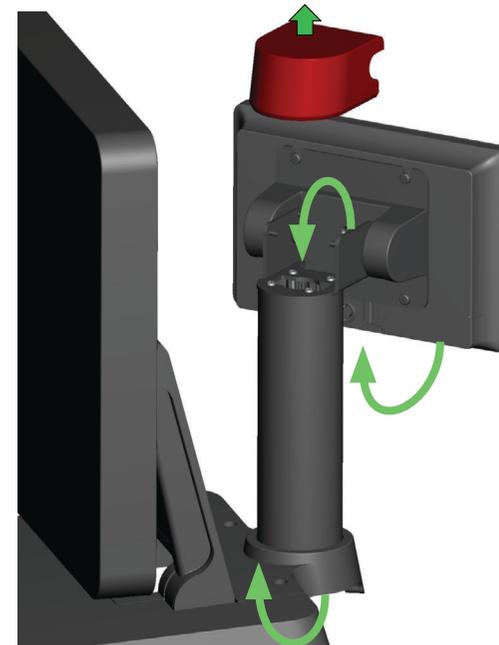

Remove pole hinge cover and route cables through pole and connect to computer. Reinstall pole cover.