

Quick Installation Guide

ECM and Power Module Kit for Elo 02-Series Interactive Digital Signage (IDS) Monitors

Elo Touch Solutions Technical Support

Online self-help: www.elotouch.com/go/websupport

Technical Support contacts in your region:

www.elotouch.com/go/contactsupport

Revision A
P/N E600020

North America

Elo Touch Solutions
1033 McCarthy Boulevard
Milpitas, CA 95035

800-ELO-TOUCH

Tel +1 408 597 8000

Fax +1 408 597 8050

customerservice@elotouch.com

Europe

Tel +32 (0)16 70 45 00

Fax +32 (0)16 70 45 49

elosales@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385

Fax +86 (21) 3329 1400

www.elotouch.com.cn

Latin America

Tel 786-923-0251

Fax 305-931-0124

www.elotouch.com



The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.


Elo (logo) and Elo Touch Solutions are trademarks of Elo and its Affiliates.

Please go to www.elotouch.com/support to download detailed user guide for this product

Note: ECM not included in standalone power module kit.


Caution: Remove power cord from IDS before installing this product.

1

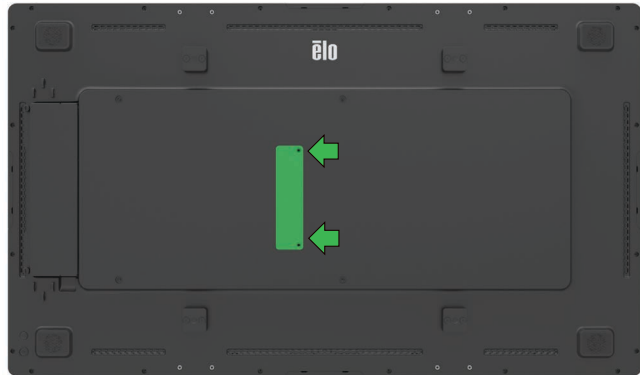


Remove the ECM docking cover from the rear of the IDS.

2

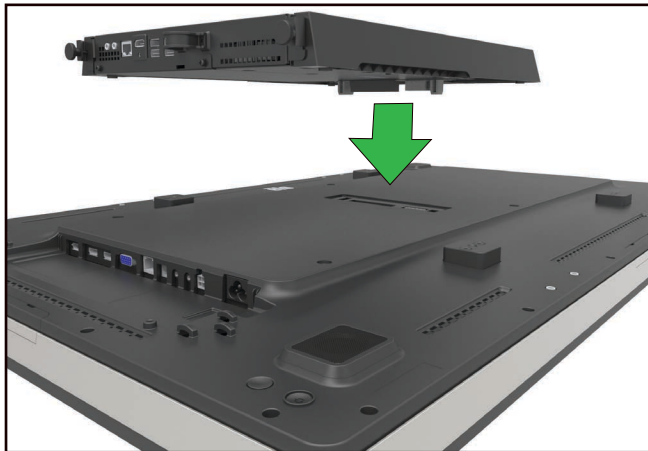

Plug the power module into the ECM dock on the rear of the IDS.
ECM may be pre-installed or installed later.


3

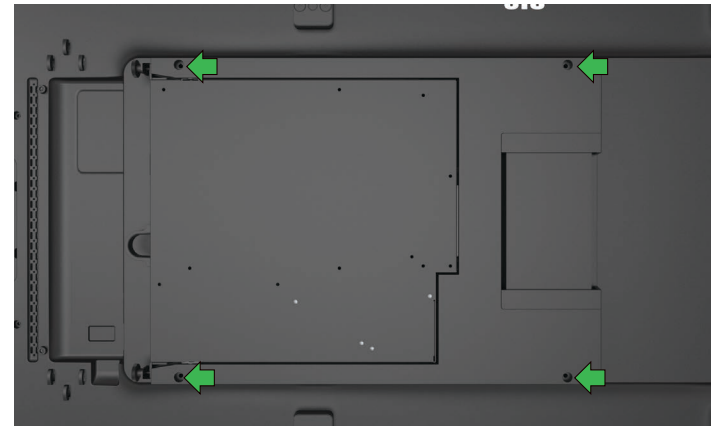

Tighten the 4 captive screws in the corners of the ECM power module.
Mount the IDS to any VESA compliant wallmount using the extension
spacers and screws (included).



4

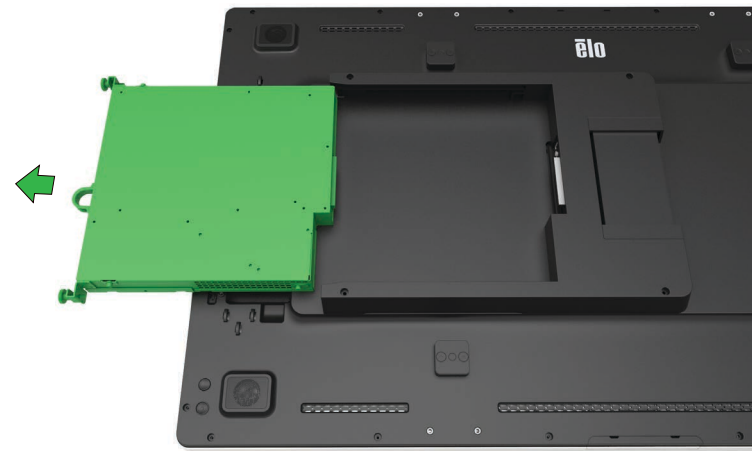

To replace the ECM, loosen the thumbscrews and slide out. Reinstall is
reverse of removal.