


THIS DRAWING IS A CONTROLLED DOCUMENT. DRAWING NO. MS600130

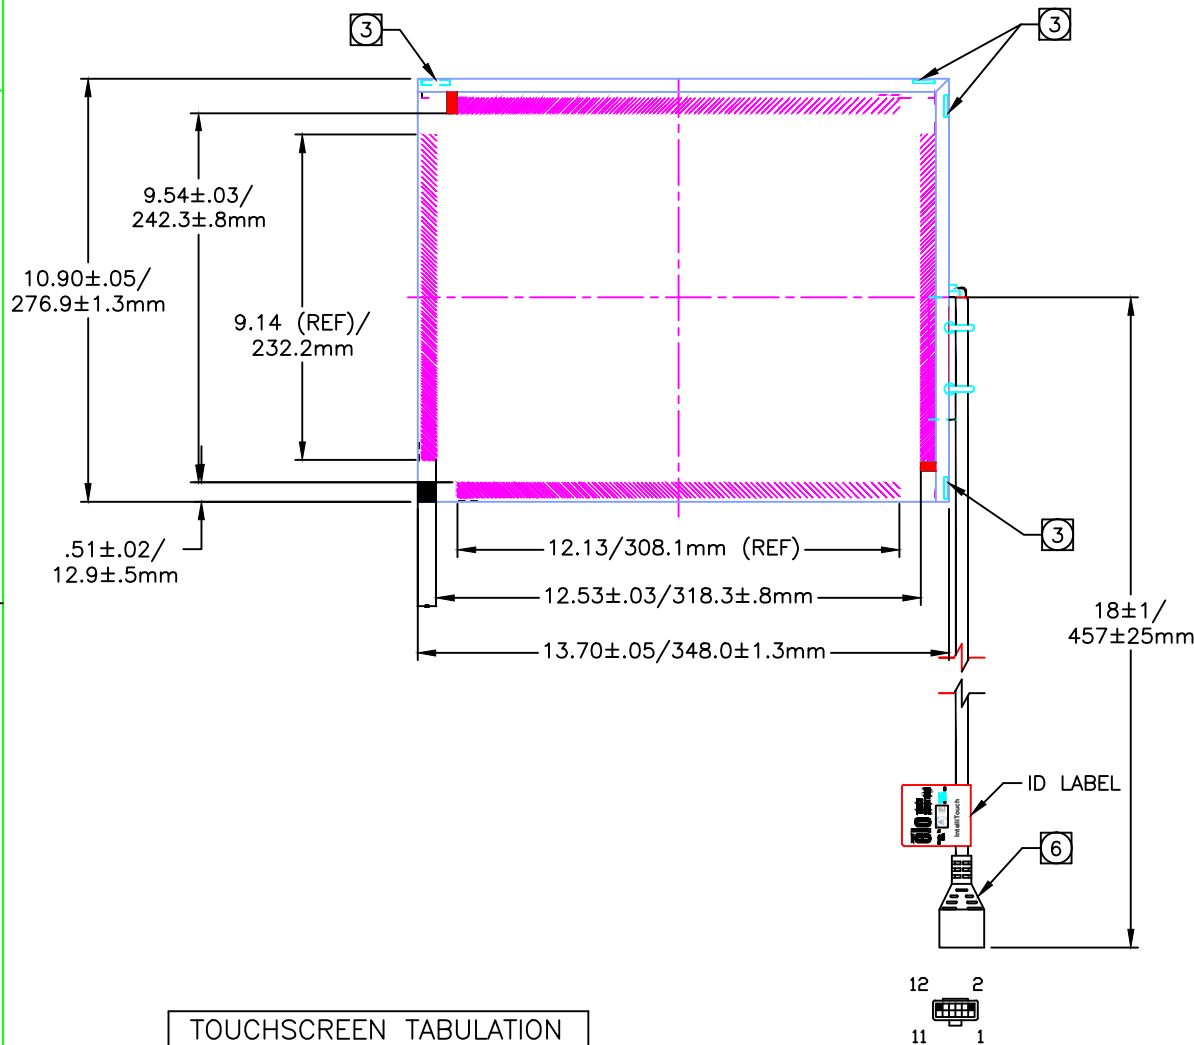

NOTES:

1. ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS.
2. GLASS THICKNESS: 0.12±0.012" [3.0±0.3]mm.
3. TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. GLASS IS BEVELED UNDER TRANSDUCERS.
4. NO MATERIAL EXTENDS MORE THAN .030/.8mm BEYOND THE BACK SURFACE OF THE GLASS.
5. TRANSDUCER HEIGHT ABOVE GLASS SURFACE: 0.06" [1.5mm] MAXIMUM.
6. BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:
 -INTELLITOUCH SERIAL CONTROL BOARD
 -012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
7. THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		

TOUCHSCREEN TABULATION	
PART NUMBER	SURFACE FINISH
E036489	CLEAR
E072176	ANTI GLARE

REV	DESCRIPTION	DATE	BY	CHKD
C	REV PER ECO-13-0127, REMOVED TOUCH SOLUTIONS FROM LOGO	05/10/13	DI	
B	REVISED PER ECO-12-014540 ELO TITLE BLOCK WAS TE	08/31/12	DI	
A	INITIAL RELEASE	11/25/05		

DIMENSIONS: mm
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± .8
 1 PLC ± .4
 2 PLC ± .2
 3 PLC ± .1
 4 PLC ± .1
 ANGLES: 1/2"
 SURFACE TEXTURE: N/A

DWN	-	MATERIAL	INTELLITOUCH	HEAT TREAT	
CHK	-				
APVD	-				
DIMENSIONAL DRAWING, SCN-IT-FLT15.0-001-00X-R					
SCALE	1:1	SIZE	A2	DRAWING NO	MS600130
SHEET	1	OF	1	REV	C

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO ELO TOUCH SOLUTIONS. IT IS NOT TO BE DISCLOSED TO ANYONE, OTHER THAN ELO PERSONNEL, WITHOUT THE AUTHORIZATION FROM ELO (www.elotouch.com).

LOC
DIST