


CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	H
2	X
3	S
4	Y
5	L

THIS DRAWING IS A CONTROLLED DOCUMENT. MS600832


30±.76



GASKET ON NEAR SIDE

2±.5 ALL AROUND

DOUBLE-SIDE PSA, 0.13MM THICK

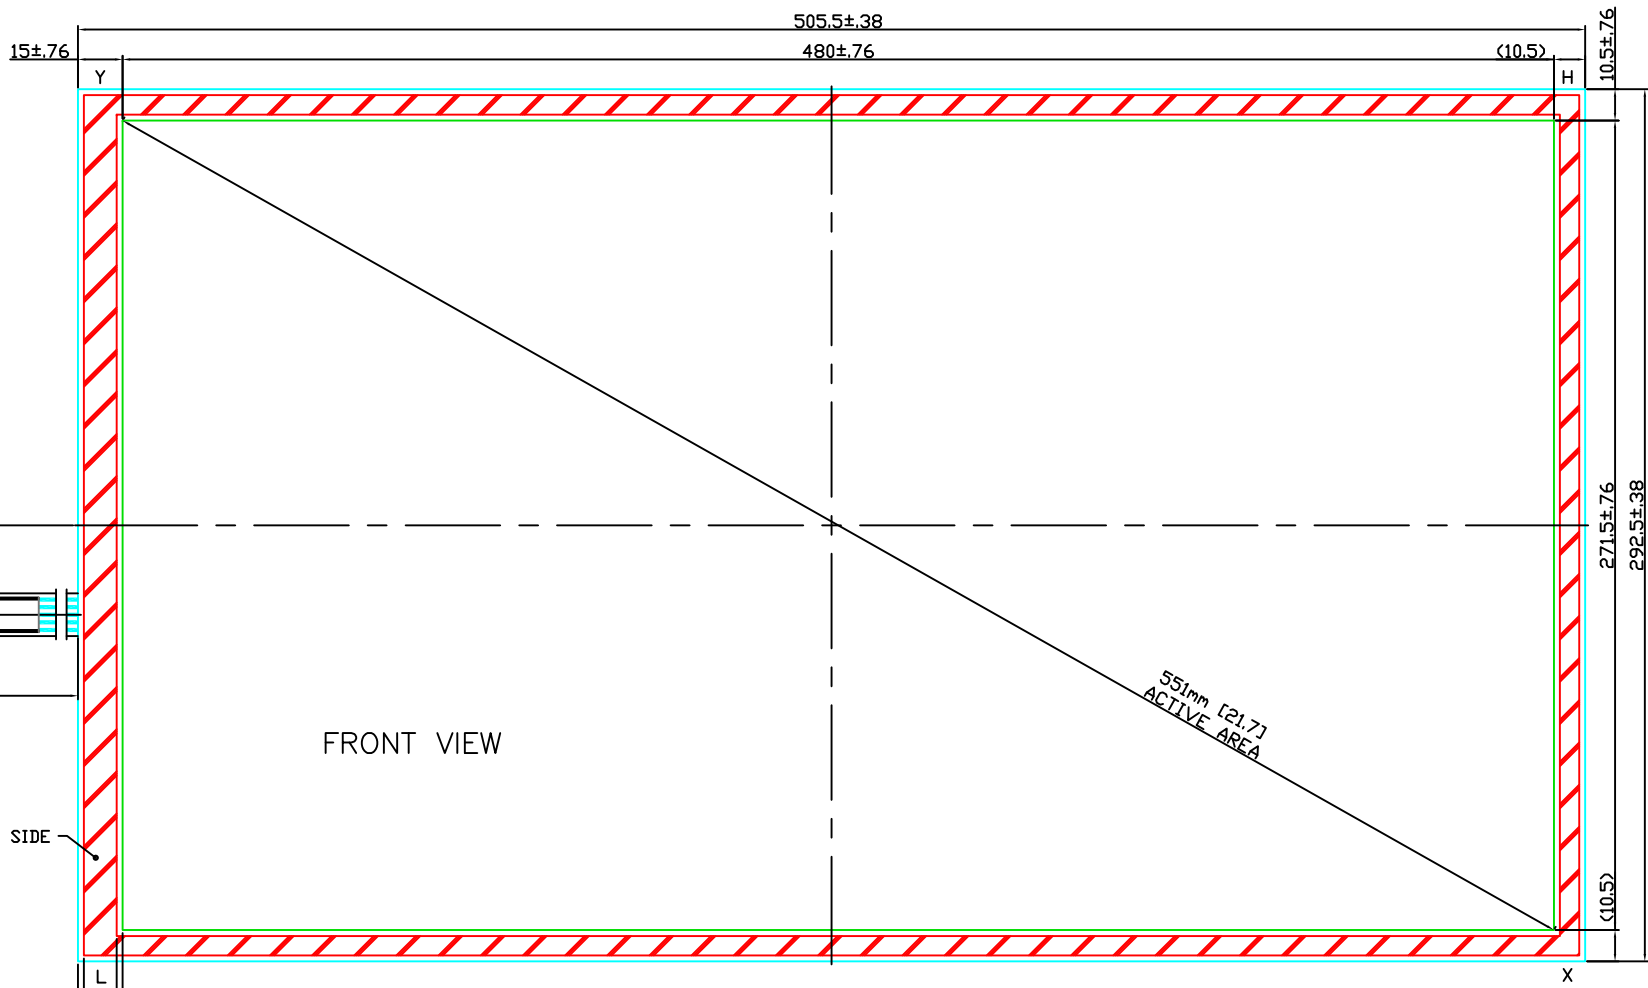

D  
C  
B  
A

(3.53) SCREEN ONLY

**NOTES:**

1. GLASS THICKNESS 3.2mm NOMINAL.
2. FINISHED PART THICKNESS 3.5mm NOMINAL.
3. FRONT GASKET: DOUBLE-SIDED PSA, 0.13mm THICK, CLEAR.
4. SCREEN USES THERMAL CURE CAULK.

REV	DESCRIPTION	DATE	BY	CHK
C	REV PER ECO-13-0133, REMOVED TOUCH SOLUTIONS FROM LOGO	05/24/13	DI	
B	ECO-12-014540: REBRANDED TO ELO TOUCH SOLUTIONS	08/31/12	BA	DD
A	ECO-10-008946: INITIAL RELEASE	06/25/09	QC	QC

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0	PLC ± 1	1	PLC ± 2
1	PLC ± 2	2	PLC ± 3
2	PLC ± 3	3	PLC ± 4
3	PLC ± 4	4	PLC ± 5
ANGLES: 5		SURFACE TEXTURE: N/A	

DRN	Q. CHUNG	03/17/10	MATERIAL	RESISTIVE (ACCUTOUCH)	HEAT TREAT	N/A
CHK	Q. CHUNG	03/17/10				
APVD	Q. CHUNG	03/17/10				
DIMENSIONAL DRAWING SCN-AT-FLT21.5-W01-0H1-R						
SCALE	1:1	SIZE	A2	DRAWING NO.	MS600832	SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT. MS600832