USED ON E374999

CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	H
2	X
3	S
4	Y
5	L

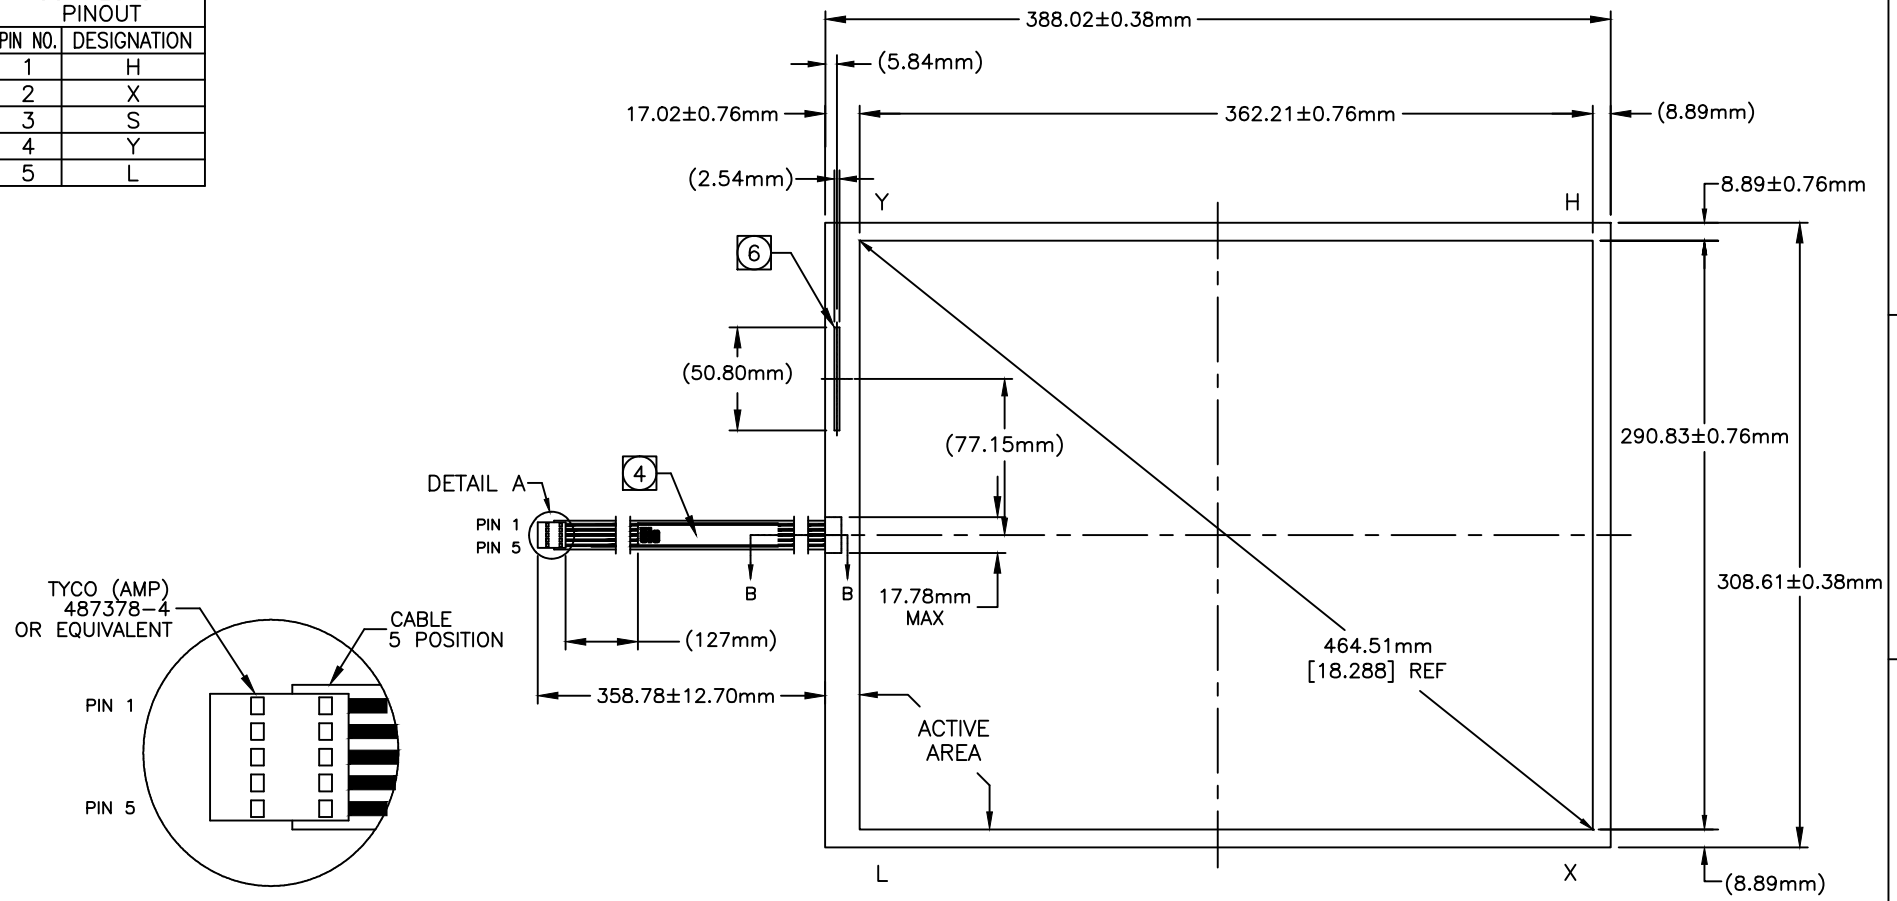

NOTES:

1. GLASS THICKNESS 3.18mm NOMINAL.
2. FINISHED PART THICKNESS 3.48mm NOMINAL.
3. FINISHED PART THICKNESS AT CABLE ATTACHMENT AREA 4.24mm MAX.
4. LABEL TO BE ATTACHED TO FRONT SIDE OF CABLE.
5. CABLE IS ATTACHED TO THE LEFT SIDE OF TOUCHSCREEN AT CENTER POINT AS SHOWN.
6. FINISHED PART THICKNESS AT THE COVERSHEET CONTACT 3.86mm MAX.

P	LTR	REVISION RECORD	DATE	DWN	APVD
	C	REV PER ECO-13-0174, REMOVED TOUCH SOLUTIONS FROM LOGO	06/01/13	DI	
	B	REVISED PER ECO-12-015013 ELO TITLE BLOCK WAS TE	09/10/12	DI	
	A	INITIAL RELEASE	04/04/06		

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± –, 1 PLC ± –, 2 PLC ± –, 3 PLC ± –, 4 PLC ± –
ANGLES± –
SURFACE TEXTURE N/A

DWN
CHK
APVD
MATERIAL ACCUTOUCH
HEAT TREAT
NAME DIMENSIONAL DRAWING, SCN-A5-FLT18.1-Z01-0H1-R
SCALE 1:1
SIZE A2
DRAWING NO MS600335
SHEET 1 OF 1
REV C

LOC
DIST

3307-7 (3/11)

DWG NO MS600335

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO ELO TOUCH SOLUTIONS INC. AND ITS WORLDWIDE SUBSIDIARIES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN ELO PERSONNEL WITHOUT AUTHORIZATION FROM ELO (www.elotouch.com).

8 7 6 5 4 3 2 1

D C B A