



INTELLITOUCH® TOUCHSCREEN
 SCN-IT-FLT15.1-004-00X-R

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS AND INCHES.
2. GLASS THICKNESS: 3.0±0.3mm [0.12±0.012"].
3. TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN.
4. WIRES ARE ROUTED ON THE TOP SURFACE OF THE GLASS, ALONG ITS EDGE.
5. BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:
 -INTELLITOUCH SERIAL CONTROL BOARD
 -012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
6. THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.

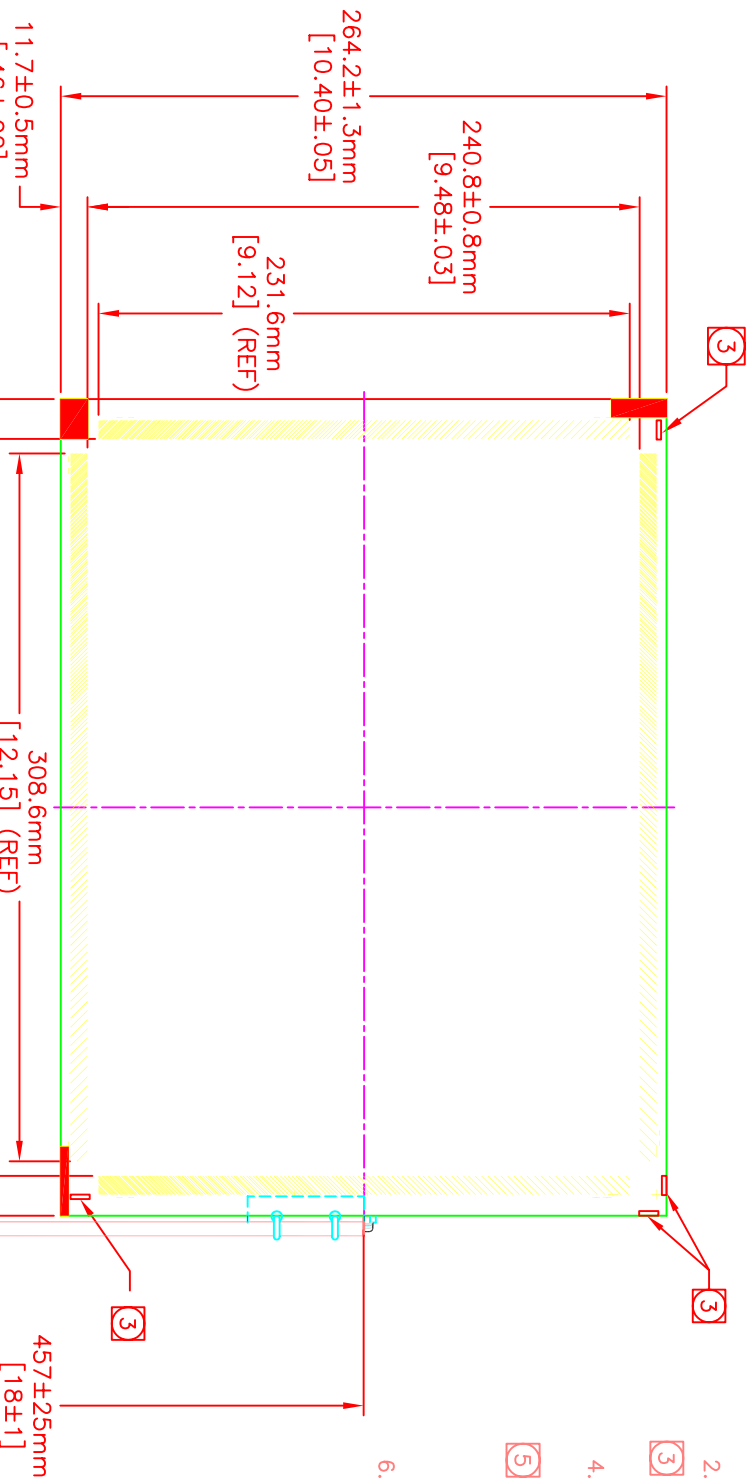

TOUCHSCREEN TABULATION	
PART NO	SURFACE FINISH
E414279	ANTI-GLARE
E225579	HI-RESOLUTION ANTI-GLARE



PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		BLK
3	Y RECEIVE (+)	BLU	GRY
4	Y TRANSMIT (+)	BLU	BLK
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	RED	RED
11	X RECEIVE (+)	GRN	RED
12	X RECEIVE (+)	WHT	BLK