


THIS DRAWING IS A CONTROLLED DOCUMENT. DRAW NO. MS600127

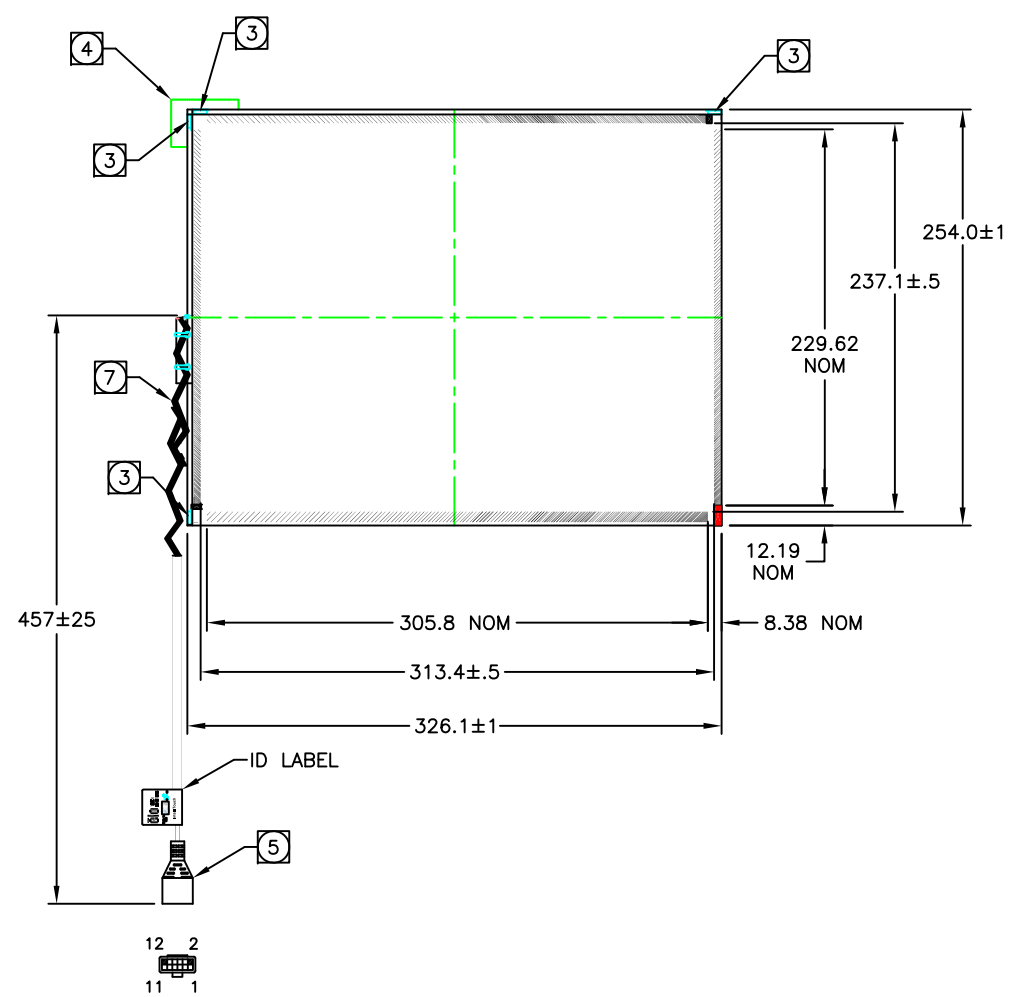

NOTES:

- 1 ALL DIMENSIONS ARE IN MILLIMETERS.
- 2 GLASS THICKNESS: 3.0±0.3.
- 3 TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. GLASS IS BEVELED UNDER TRANSDUCERS. HEIGHT OF TRANSDUCERS ABOVE GLASS: 1.5 MAXIMUM.
- 4 CABLE ROUTING ADDS A MAXIMUM OF 2.5 AS INDICATED ON THE SCREEN. CABLE IS ROUTED ALONG THE BEVEL.
- 5 BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:
 -INTELLITOUCH SERIAL CONTROL BOARD
 -012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
- 6 THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.
- 7 CABLE JACKET STRIPPED 152 FOR EASE DURING THE INTEGRATION PROCESS.

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		

TOUCHSCREEN TABULATION	
PART NUMBER	SURFACE FINISH
E107313	CLEAR
E449313	ANTI GLARE

P	LTR	REVISION RECORD	DATE	DRN	APVD
E		REV PER ECO-13-0127, REMOVED TOUCH SOLUTIONS FROM LOGO	05/10/13	DI	
D		REVISED PER ECO-12-014540 ELO TITLE BLOCK WAS TE	10/01/12	BC	SS
C		ECO-12-015683: NEW ID LABEL 781019 VERT ORIENTATION; ADDED TO PLACEMENT	09/17/12	BC	LA

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± .8
 1 PLC ± .4
 2 PLC ± .2
 3 PLC ± -
 4 PLC ± -

ANGLES: 1/2°
 SURFACE TEXTURE: N/A

DRN	-	MATERIAL	INTELLITOUCH	HEAT TREAT	
CHK	-				
APVD	-				
NAME: DIMENSIONAL DRAWING, SCN-IT-FLT15.0-004-00X-B-R					
SCALE	1:1	SIZE	A2	DRAWING NO	MS600127
SHEET	1	OF	1	REV	E

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO ELO. IT IS NOT TO BE DISCLOSED TO ANYONE OTHER THAN ELO PERSONNEL, WITHOUT PERMISSION FROM ELO (www.elo.com).

LOC
DIST