



THIS DRAWING IS A CONTROLLED DOCUMENT. DRAW NO. MS600508

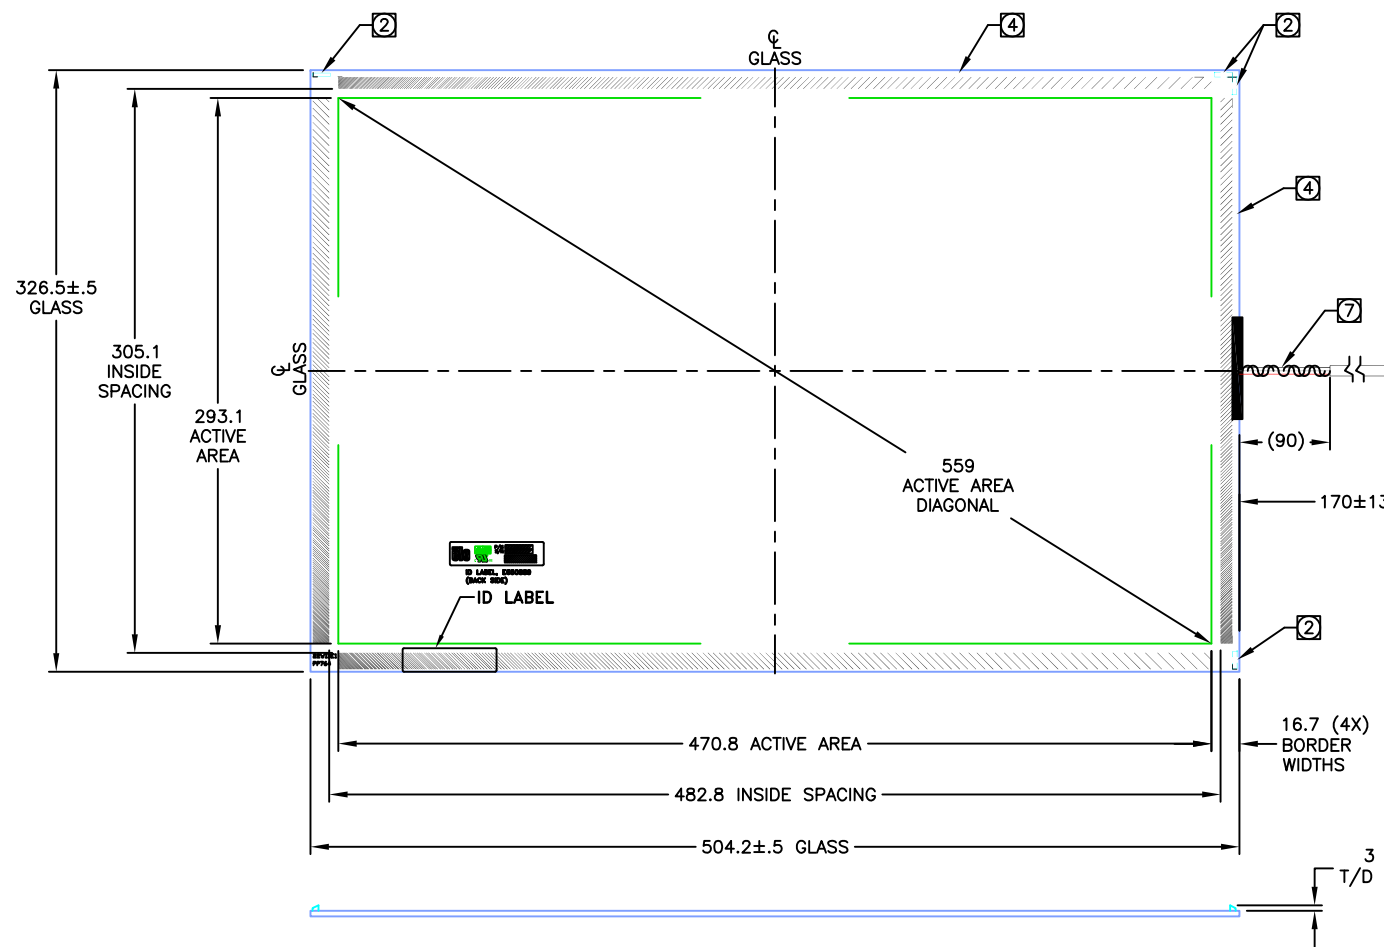

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		



NOTES:

- 1 GLASS THICKNESS: 2.8±0.2 (CLEAR SURFACE FINISH).
- 2 TRANSDUCERS LOCATED AT POSITIONS SHOWN. THE HEIGHT OF TRANSDUCER ABOVE GLASS TO BE 3 MAX.
- 3 NO MATERIAL EXTENDS MORE THAN .8 BEYOND THE BACK SURFACE OF GLASS.
- 4 CABLE IS ROUTED ALONG THE TOP EDGES OF THE GLASS. CABLE ATTACHED TO GLASS USING 2-INCH WIDE BLACK TAPE.
- 5 HOUSING TYPE: BERG 65043-031, 2X6.
RECEPTACLE TYPE: BERG 48239-000.
CABLE MATES WITH ANY OF THE FOLLOWING:
> INTELLITOUCH SERIAL CONTROL BOARD
> 012226 CABLE (2X6 TO 8-INCH DB9 BULKHEAD).
- 6 TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.
- 7 CABLE IS JACKET STRIPPED 90 FOR EASE OF INTEGRATION.

REV	DESCRIPTION	DATE	BY	CHK
F	REV PER ECO-13-0133, REMOVED TOUCH SOLUTIONS FROM LOGO	05/24/13	DI	
E	ECO-12-012454: REBRANDED TO ELO TOUCH SOLUTIONS	08/22/12	BC	SS
D	REVISED PER ECO-08-022728 GLASS THICKNESS WAS 3±.3	11/28/11	DI	
P	LTR REVISION RECORD			

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± .8
	1 PLC ± .4
	2 PLC ± .2
	3 PLC ± -
	4 PLC ± -
ANGLES: 1/2°	
SURFACE TEXTURE	N/A

DRN: Q. CHUNG	DATE: 06/08/07	MATERIAL: INTELLITOUCH WIDE FORMAT	HEAT TREAT: HIGH RESOLUTION ANTIGLARE
CHK: DS	DATE: 12/10/11		
APD: LEO A	DATE: 03/23/09		
NAME: DIMENSIONAL DRAWING			
SCN-IT-FLT22.0-005-024-R			
SCALE: 1:1	SIZE: A2	DRAWING NO: MS600508	SHEET: 1 OF 1
REV: F			

THIS DRAWING IS A CONTROLLED DOCUMENT. ANY CHANGES TO THIS DRAWING SHALL BE MADE BY THE ORIGINAL DESIGNER OR HIS AUTHORIZED REPRESENTATIVE. ANY CHANGES MADE BY OTHER PERSONNEL WITHOUT THE AUTHORIZATION OF THE ORIGINAL DESIGNER SHALL BE AT THE USER'S RISK.