


THIS DRAWING IS A CONTROLLED DOCUMENT. PART NO MS600131

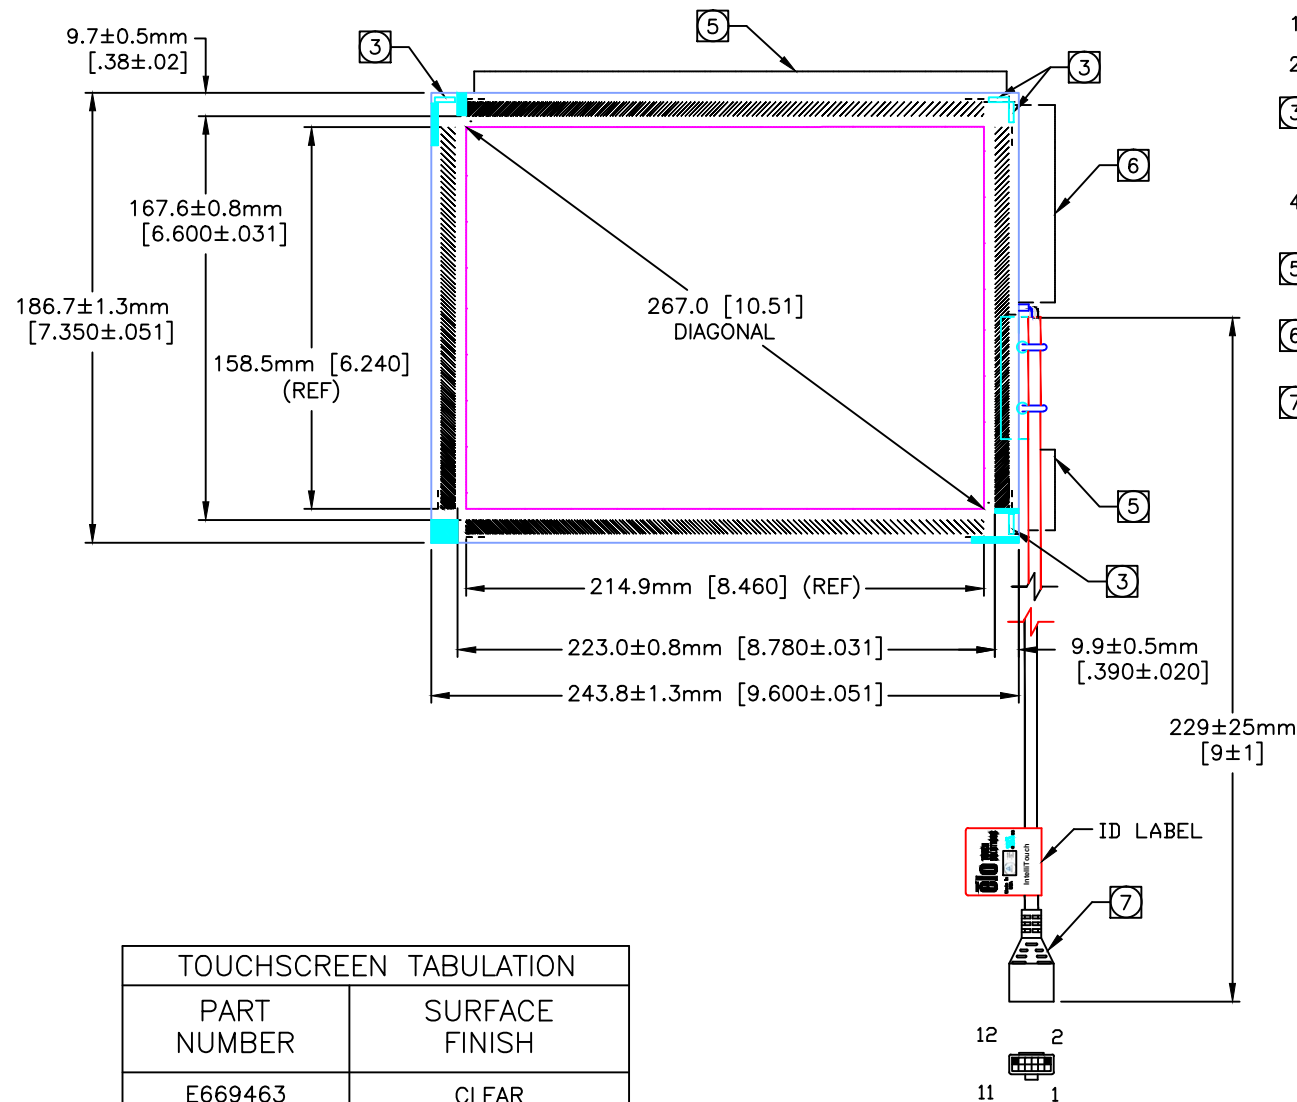

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS.
2. GLASS THICKNESS: 3.0±0.3mm[0.12±0.012"].
3. TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. HEIGHT OF TRANSDUCERS ABOVE GLASS: 3.8mm/.150 MAX
4. NO MATERIAL EXTENDS MORE THAN 0.8mm/.03 BEYOND THE BACK SURFACE OF THE GLASS.
5. CABLE ROUTING ADDS 2.5mm/.10 MAX AS INDICATED ON SCREEN.
6. CABLE ROUTING ADDS 3.8mm/.15 MAX AS INDICATED ON SCREEN.
7. BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:  
 -INTELLITOUCH SERIAL CONTROL BOARD  
 -012226 CABLE (2x6 TO 8" DB9 BULKHEAD)

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		

TOUCHSCREEN TABULATION	
PART NUMBER	SURFACE FINISH
E669463	CLEAR
E759737	ANTI GLARE
E753610	HI-RESOLUTION ANTI GLARE

P	LTR	REVISION RECORD	DATE	DWG	APVD	SURFACE TEXTURE
C		REV PER ECO-13-0127, REMOVED TOUCH SOLUTIONS FROM LOGO	05/10/13	DI		
B		REVISED PER ECO-12-014540 ELO TITLE BLOCK WAS TE	08/31/12	DI		
A		INITIAL RELEASE	11/21/05			

<b>DIMENSIONS:</b>	<b>TOLERANCES UNLESS OTHERWISE SPECIFIED:</b>
mm	0 PLC ± .8
	1 PLC ± .4
	2 PLC ± .2
	3 PLC ± .1
	4 PLC ± .1
ANGLES ± 1/2°	
SURFACE TEXTURE N/A	

DWG	-	MATERIAL	INTELLITOUCH	HEAT TREAT	
CHK	-				
APVD	-				
NAME DIMENSIONAL DRAWING, SCN-IT-FLT10.4-003-OOX-R					
SCALE	1:1	SIZE	A2	DRAWING NO	MS600131
				SHEET	1 of 1
				REV	C

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO ELO TOUCH SOLUTIONS. IT IS NOT TO BE DISCLOSED TO ANYONE OTHER THAN ELO PERSONNEL, WITHOUT THE APPROVATION FROM ELO (www.elotouch.com).

LOC  
DIST