


THIS DRAWING IS A CONTROLLED DOCUMENT. DRAW NO MS600021

USED ON SEE TABULATION

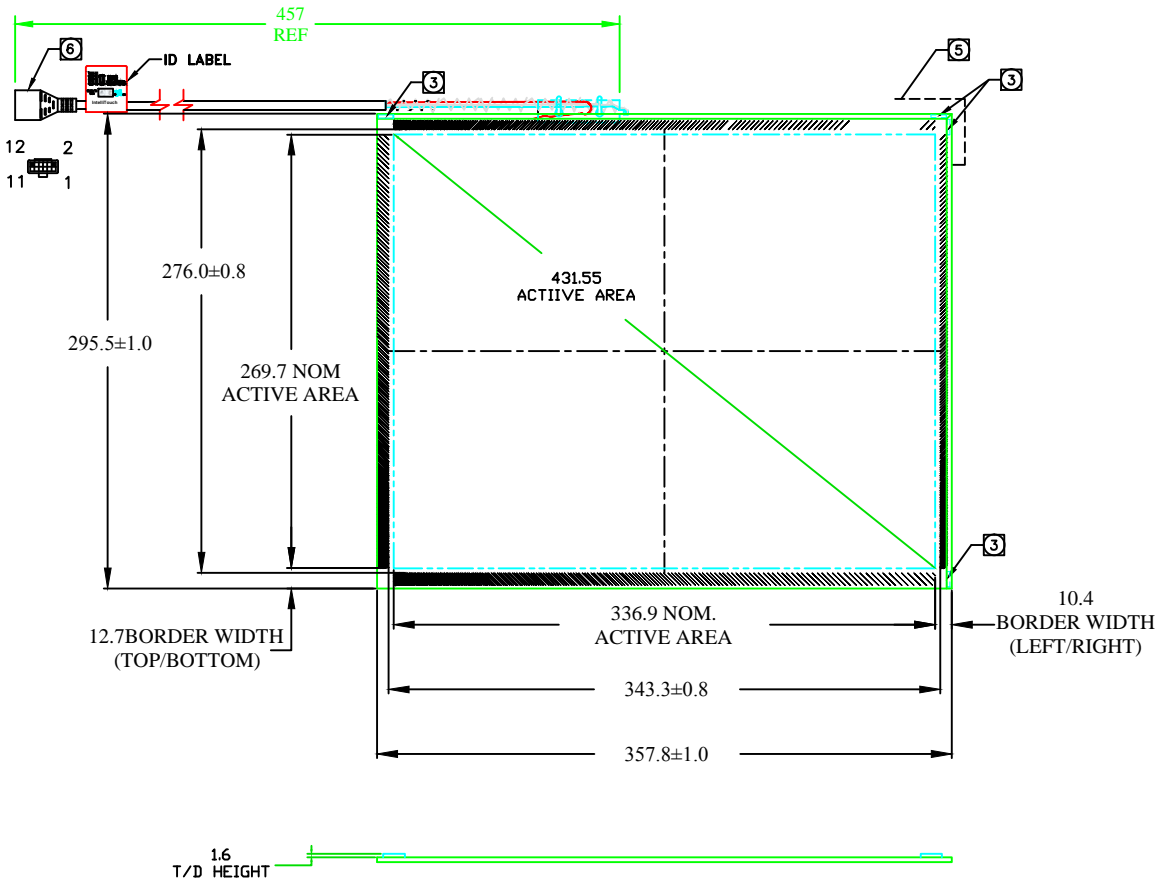

- NOTES:**
1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. GLASS THICKNESS: 3.0±.3 NOMINAL
 3. TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. HEIGHT OF TRANSDUCER ABOVE GLASS: 1.6 MAXIMUM. GLASS IS BEVELED UNDER TRANSDUCERS.
 4. NO MATERIAL EXTENDS MORE THAN 0.8 BEYOND THE BACK SURFACE OF THE GLASS.
 5. CABLE ROUTING (ALONG THE BEVEL) ADDS 2.5 MAX. AS INDICATED ON THE SCREEN.
 6. BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:
 -INTELLITOUCH SERIAL CONTROL BOARD
 -012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
 7. THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.
 8. USE ELO FOAM TAPE, P/N 521701-000 (1.6mm THICK AND 3mm WIDE) FOR SEALING.

TOUCHSCREEN TABULATION	
PART NO	SURFACE FINISH
E853800	CLEAR
E894441	ANTI-GLARE

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO ELO TOUCH SOLUTIONS. IT IS NOT TO BE DISCLOSED TO ANYONE OTHER THAN ELO PERSONNEL, WITHOUT THE AUTHORIZATION FROM ELO (www.elotouch.com).

LOC
DIST

C	REV PER ECO-13-0127, REMOVED TOUCH SOLUTIONS FROM LOGO	05/10/13	DI	
B	ECO-12-014006: REBRANDED TO ELO TOUCH SOLUTIONS	08/22/12	BA	DD
A	INITIAL RELEASE DATED 11/25/05	-	-	-
P	LTR	REVISION RECORD	DATE	DWG APVD

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± .8
 1 PLC ± .4
 2 PLC ± .2
 3 PLC ± .1
 4 PLC ± .1

ANGLES ± 1/2°
 SURFACE TEXTURE N/A

DWG	-	MATERIAL	INTELLITOUCH	HEAT TREAT	-
CHK	-				
APVD	-				
NAME: DIMENSIONAL DRAWING, SCN-IT-FLT17.0-005-00X-B-R					
SCALE	1:1	SIZE	A2	DWG NO	MS600021
				SHEET	1 of 1
				REV	C