


PROJECTED CAPACITIVE MODEL

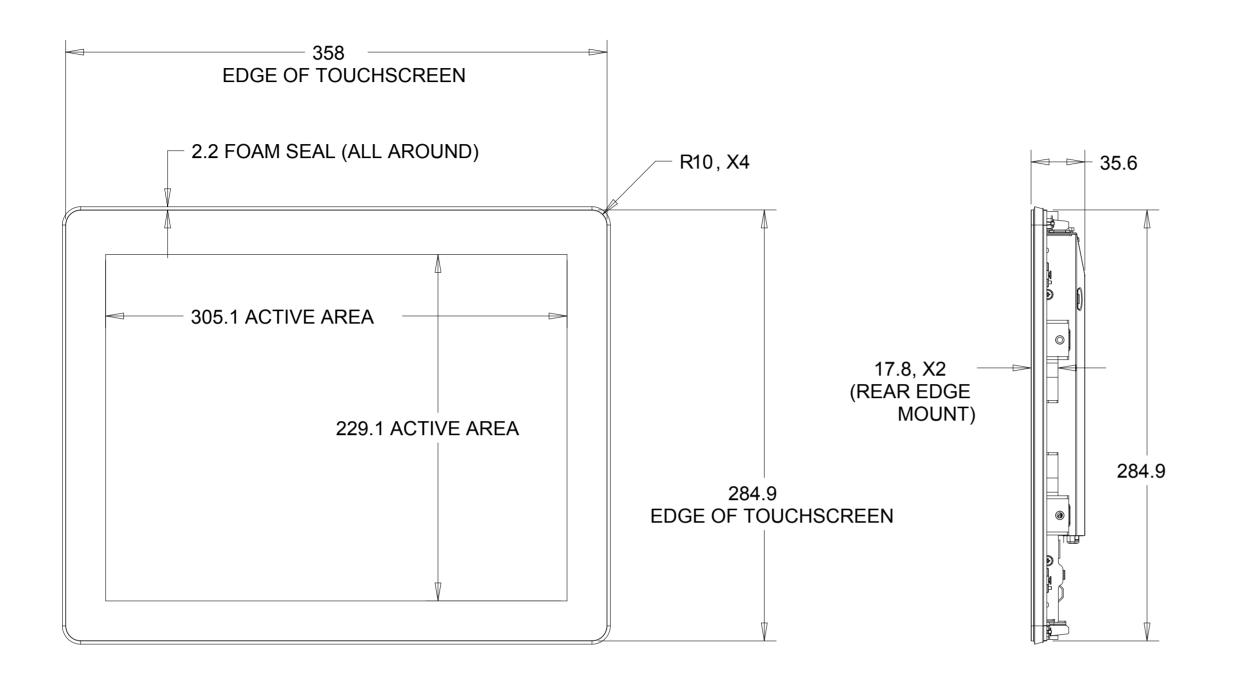

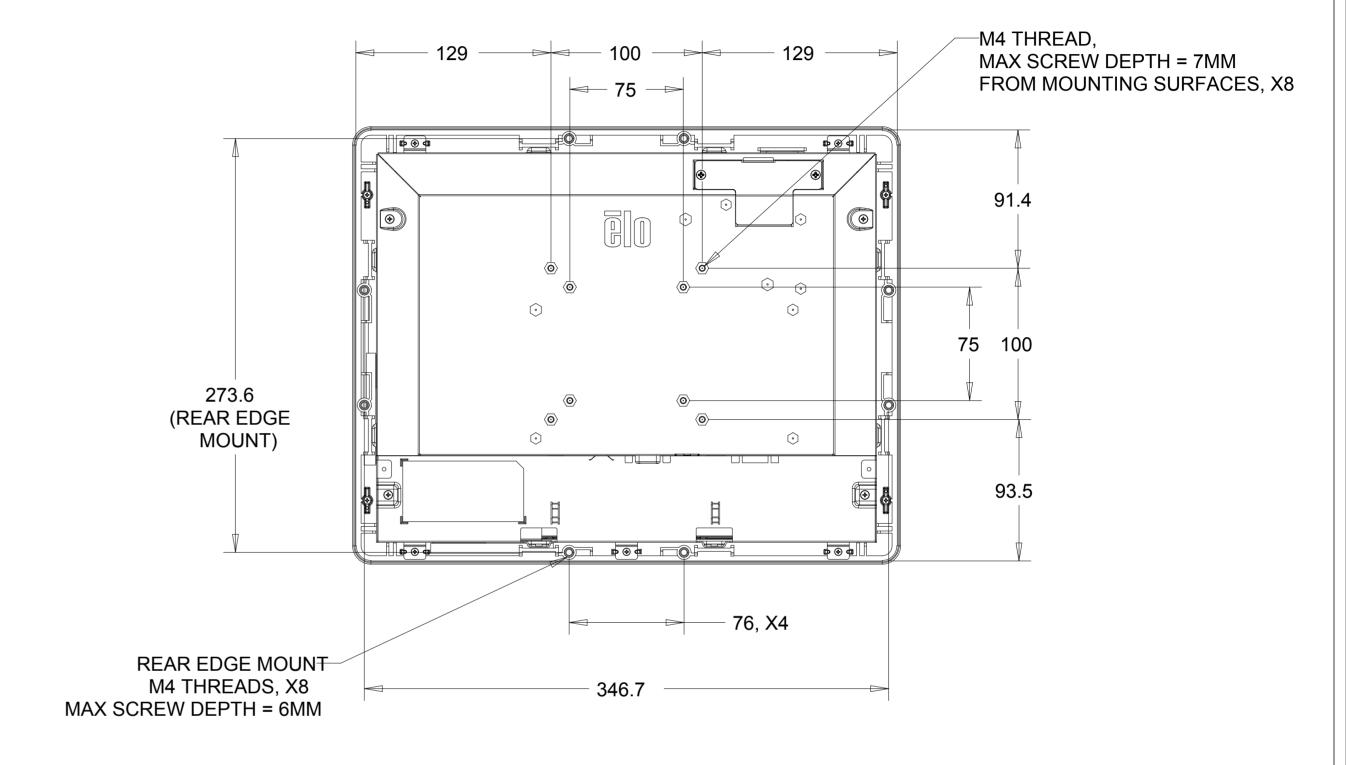

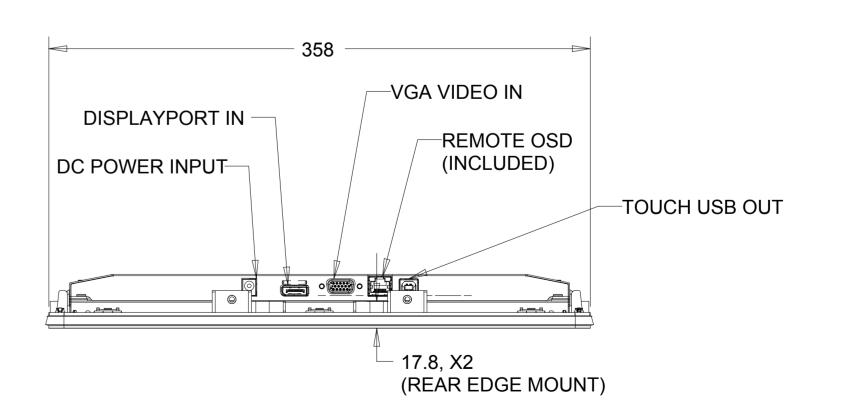


REV: A

DIMENSIONAL DRAWING: ET1590L

PROJECTED CAPACITIVE MODEL

WITH FLUSH MOUNTING BRACKETS (4 SETS INCLUDED) REPLACEMENT BRACKET KIT P/N E139556 AVAILABLE SEPARATELY

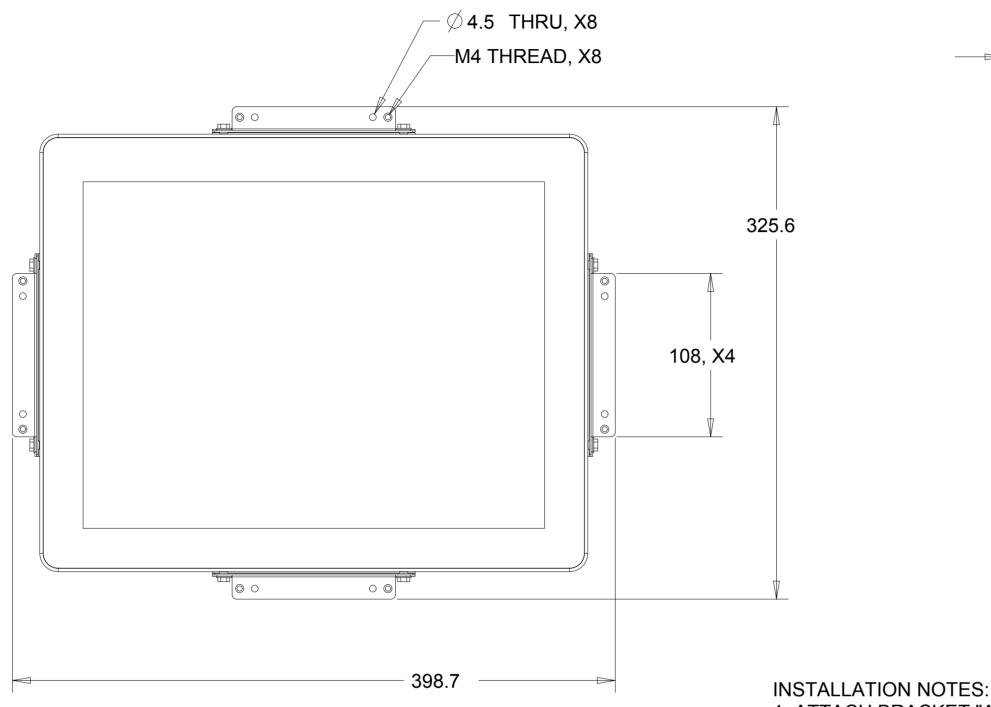

++

RECOMMENDED CUSTOMER PANEL CUT-OUT

"A" = M4 THREADED HOLES OR M4 CONCEALED

78 "A"


361.7±0.4


384.8

HEAD THREADED STUDS WITH NUTS "B" = CLEARANCE HOLES FOR M4 SCREWS

- R11.8 ± 0.3 , X4


CHOOSE ONE:

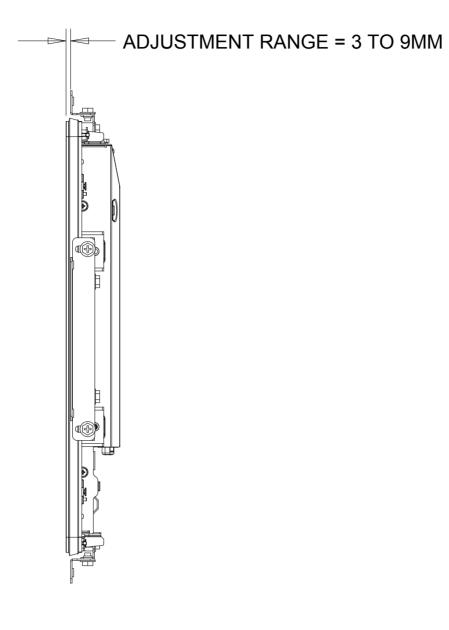


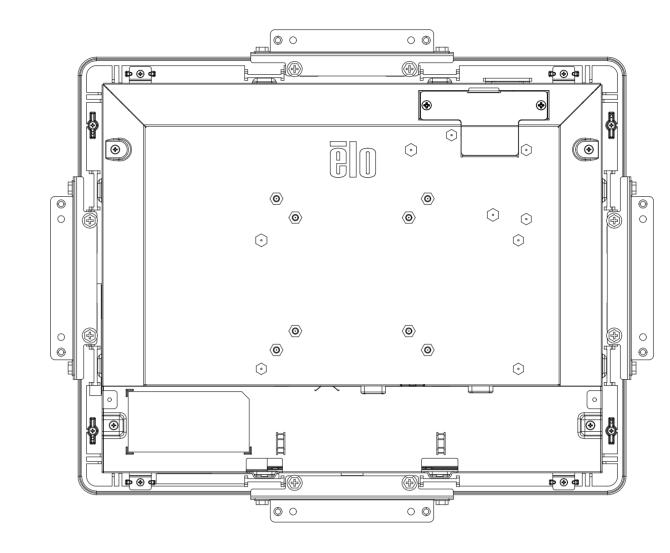



- 1. ATTACH BRACKET "A" TO CUSTOMER PANEL (ALL FOUR SIDES) WITH INCLUDED SCREWS
- 2. ATTACH BRACKET "B' TO TOUCHMONITOR (ALL FOUR SIDES) 3. PLACE TOUCHMONITOR INTO CUSTOMER PANEL OPENING,
- TAKING CARE NOT TO DAMAGE FOAM SEAL 4. ADJUST DEPTH OF BRACKETS "B" SO THE MONITOR IS
- FLUSH WITH CUSTOMER PANEL
- 5. SECURE TOUCHMONITOR TO BRACKET "B" FROM BEHIND WITH INCLUDED SCREWS

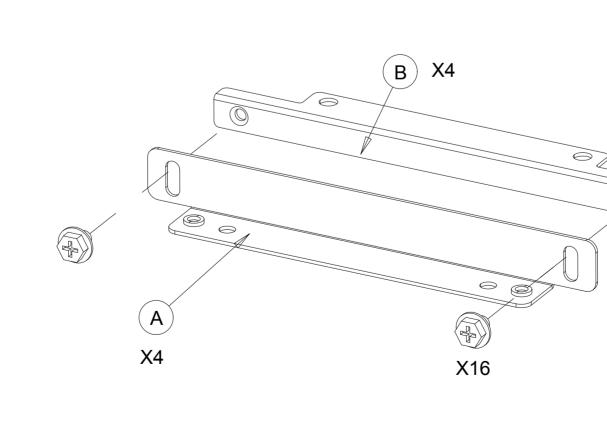

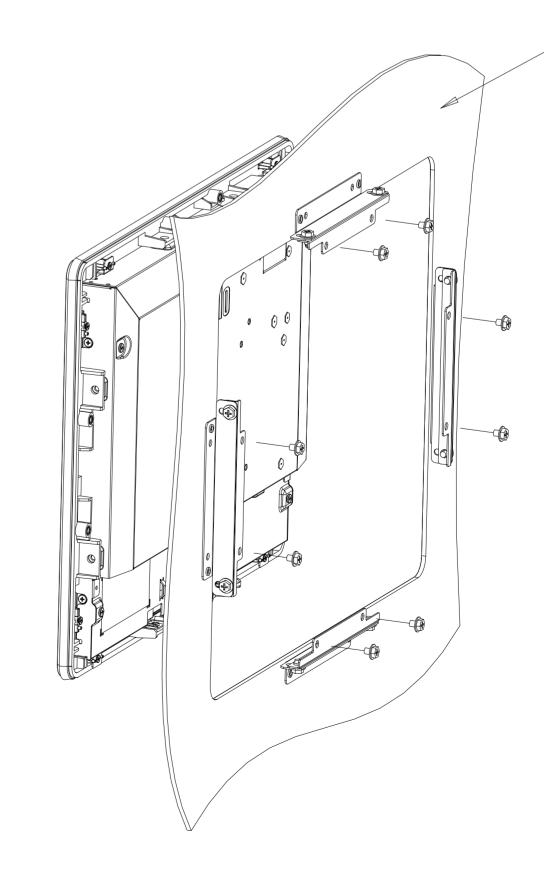

CUSTOMER PANEL (NOT INCLUDED)
MIN THICKNESS = 3MM MAX THICKNESS = 12MM

DATE: 01/06/2016

REV: A

MS601689

SHEET 2 OF 6


311.6


288.6±0.4


98 "B"


93.9


78 "A"

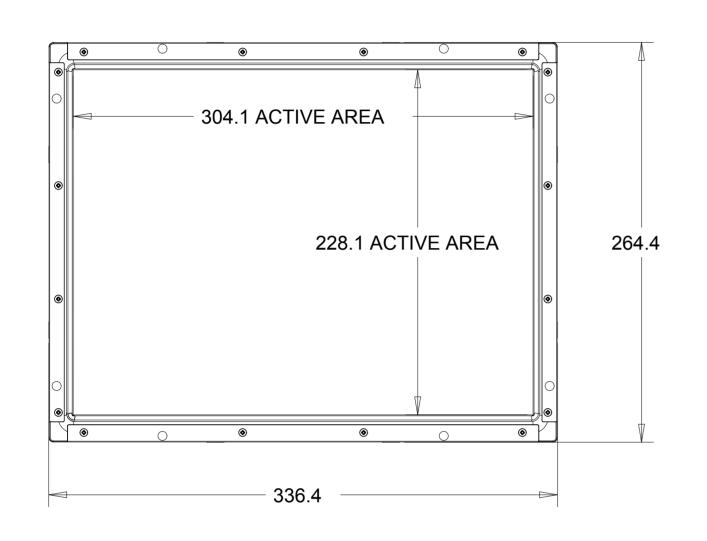

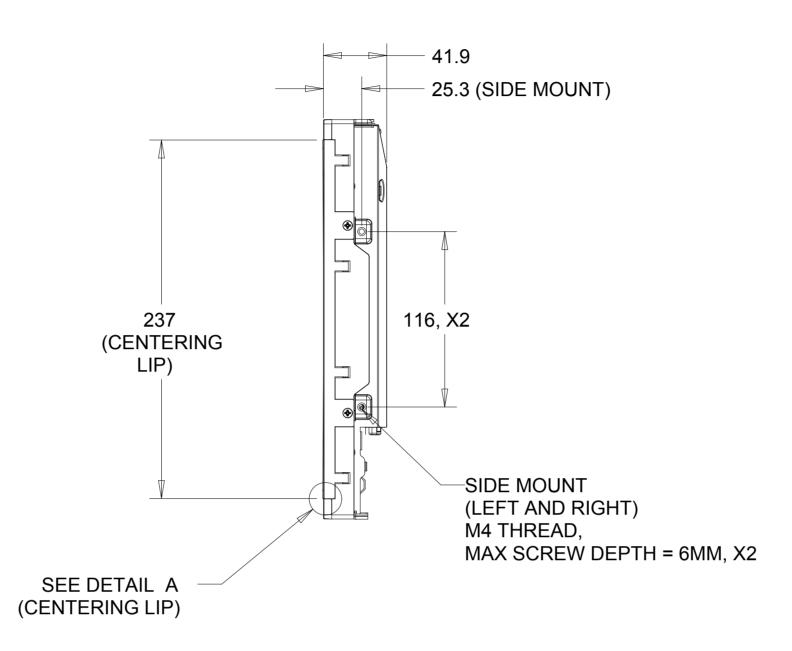


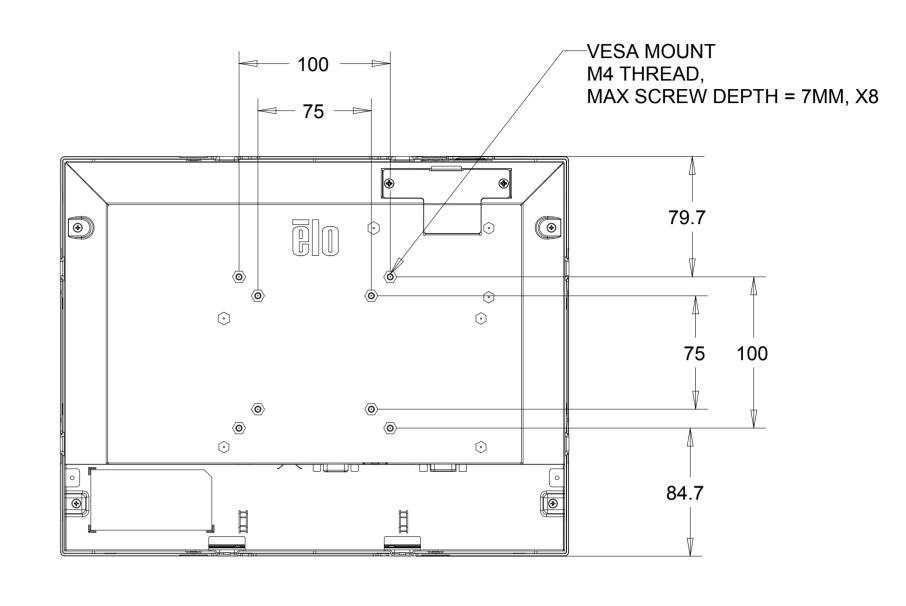


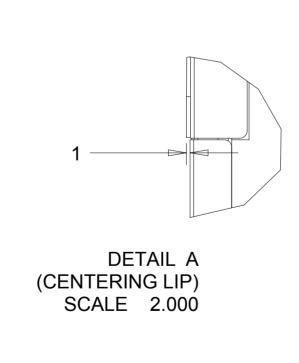


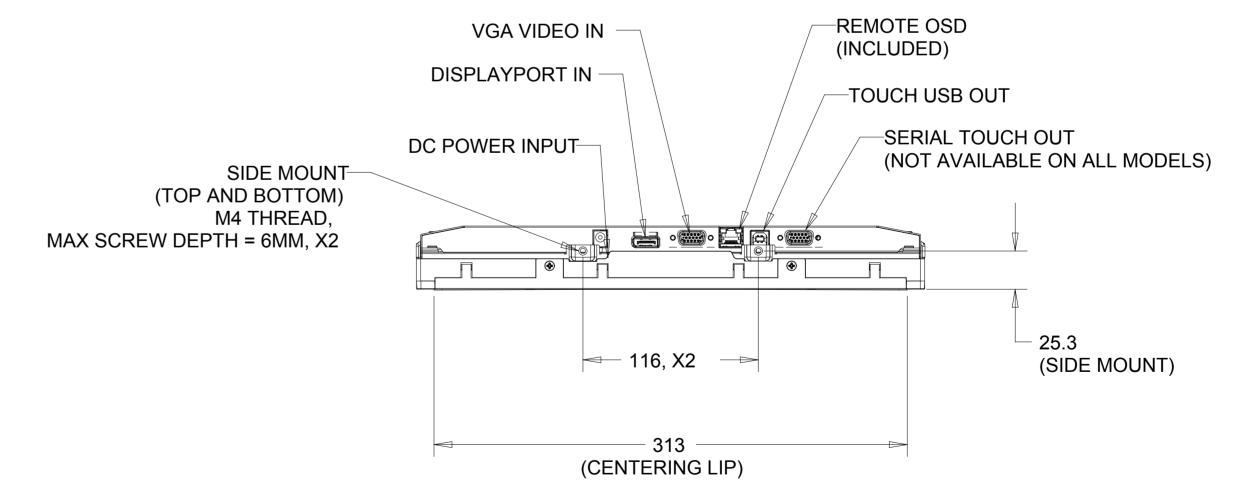

WITH SIDE MOUNTING BRACKETS (2 INCLUDED) REPLACEMENT BRACKET KIT P/N E203787 AVAILABLE SEPARATELY

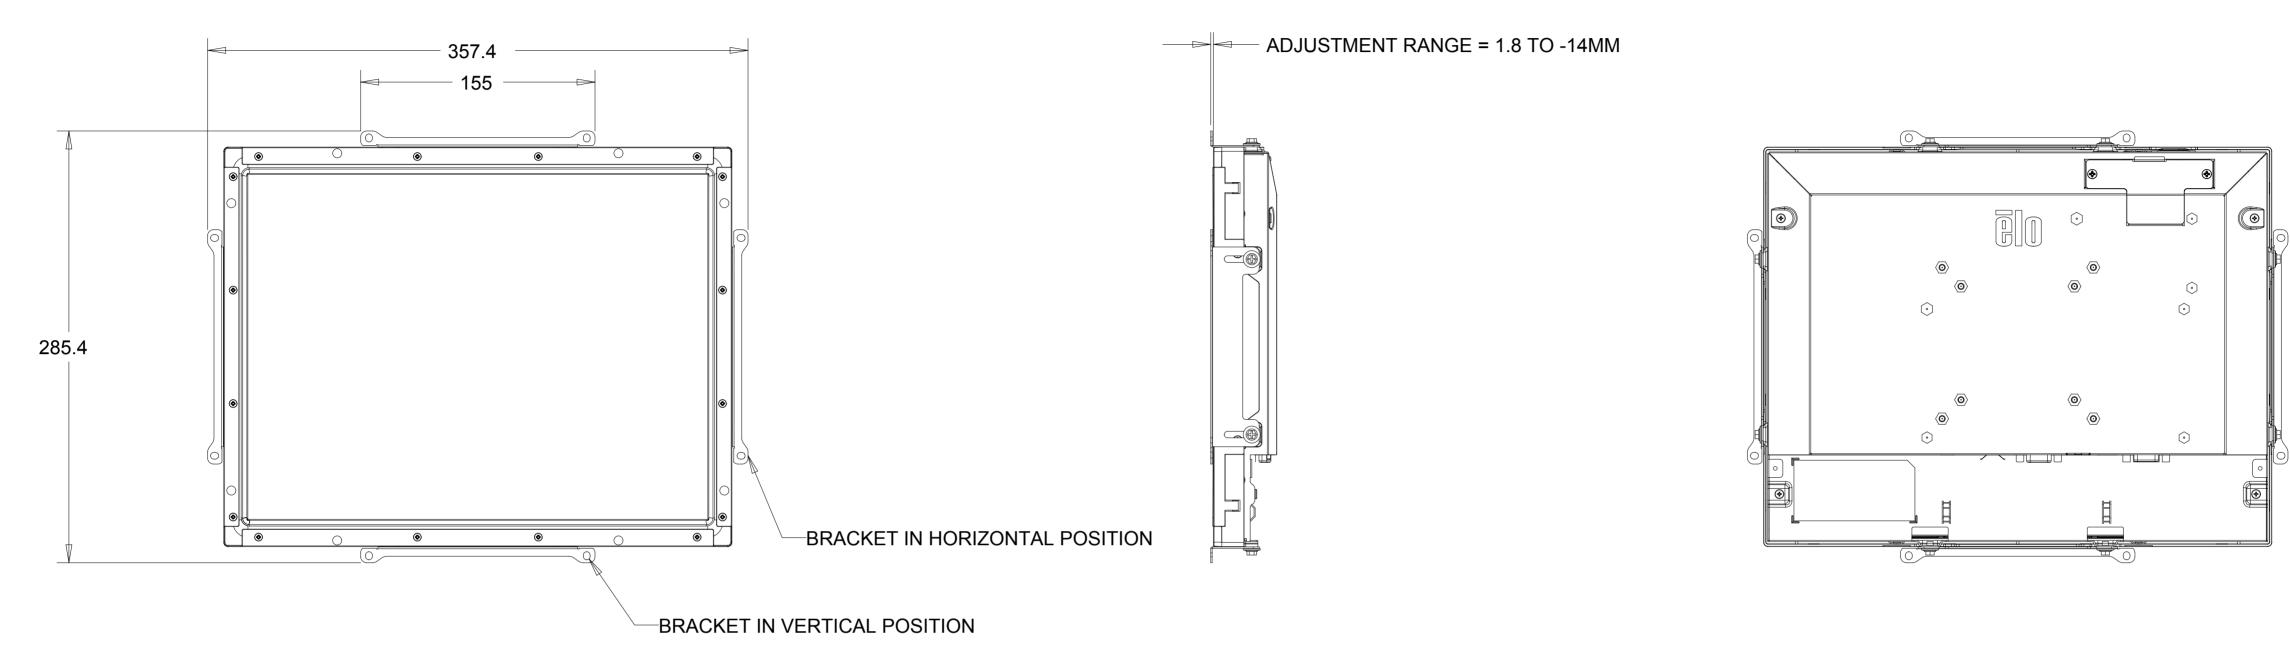

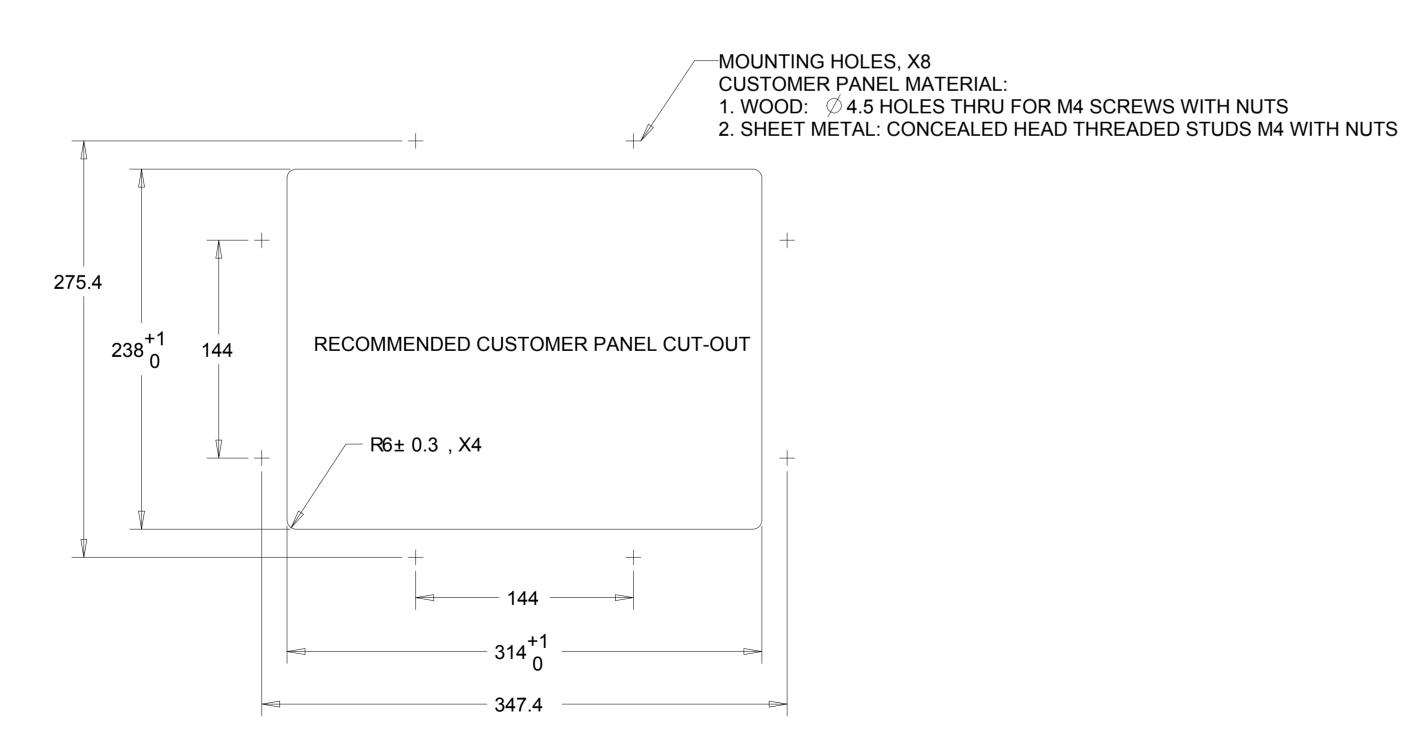

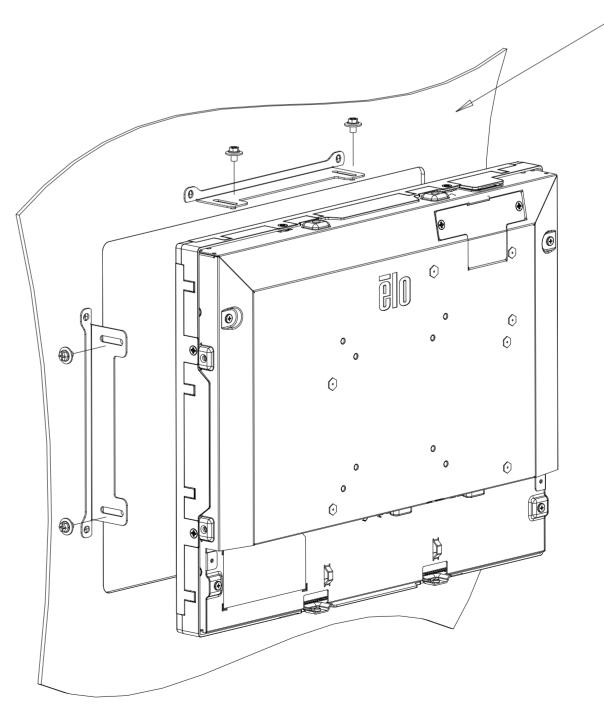



-CUSTOMER PANEL (NOT INCLUDED)
MIN THICKNESS = 1MM
MAX THICKNESS = 14MM


ēlo


REV: A

FRONT MOUNT OPTION P/N E323425 ORDERED SEPARATELY, CUSTOMER ASSEMBLED

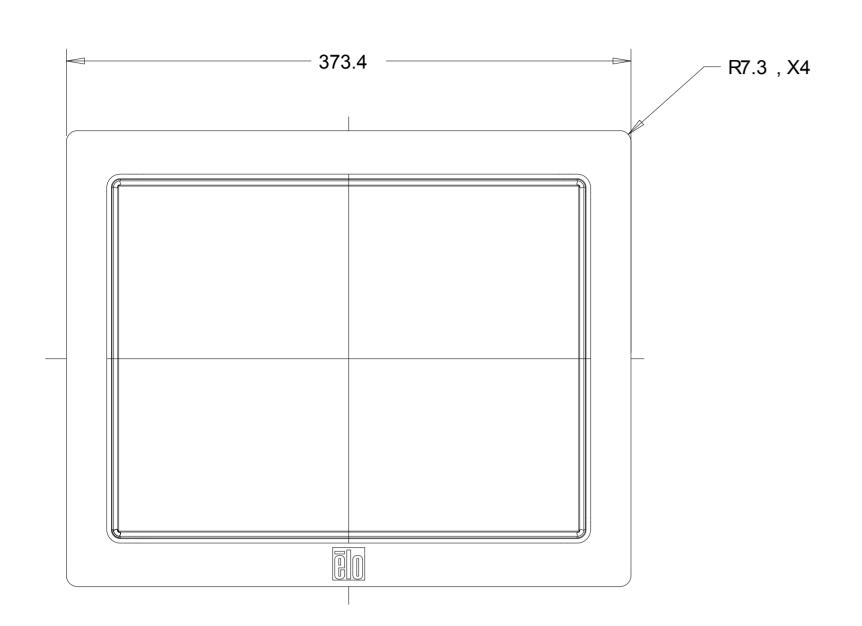

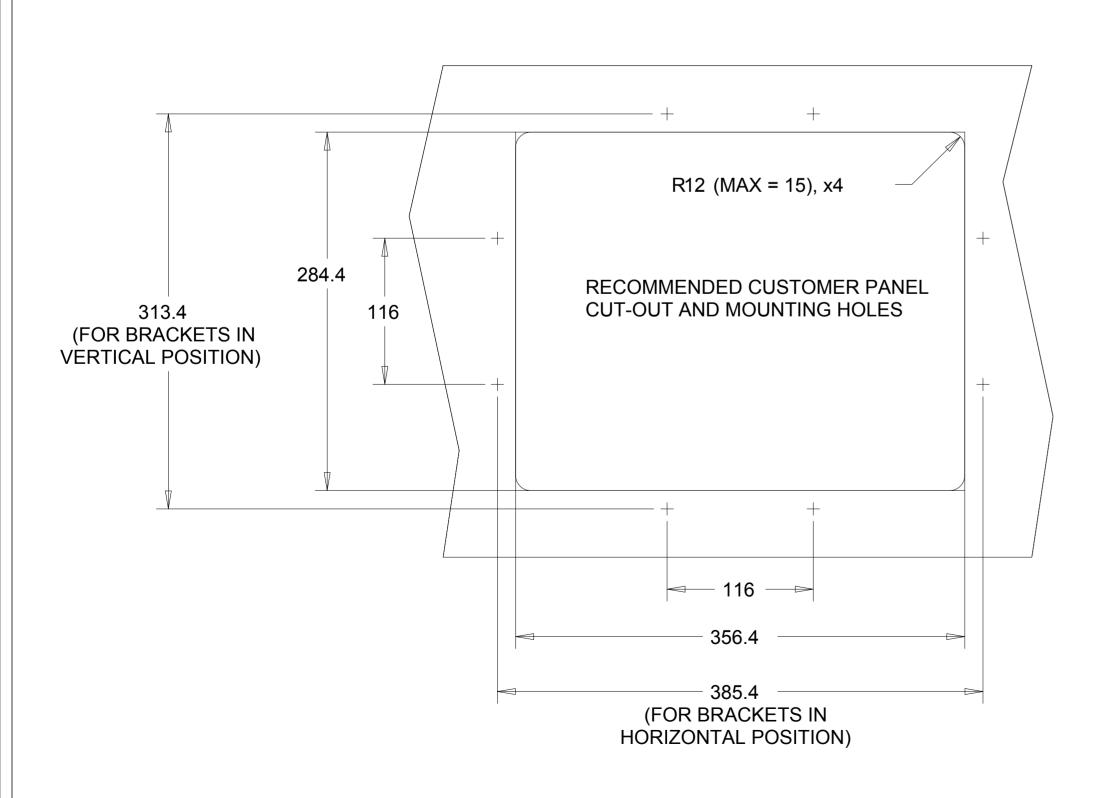

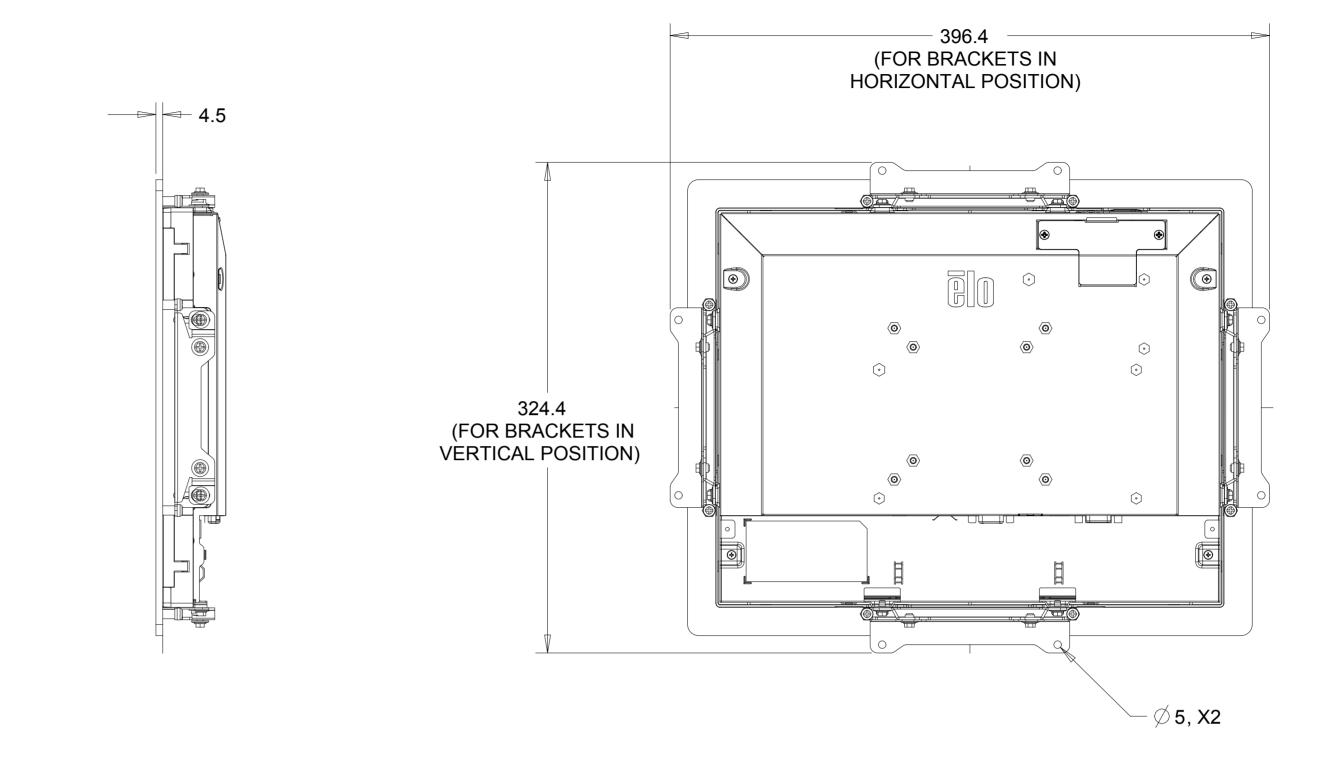

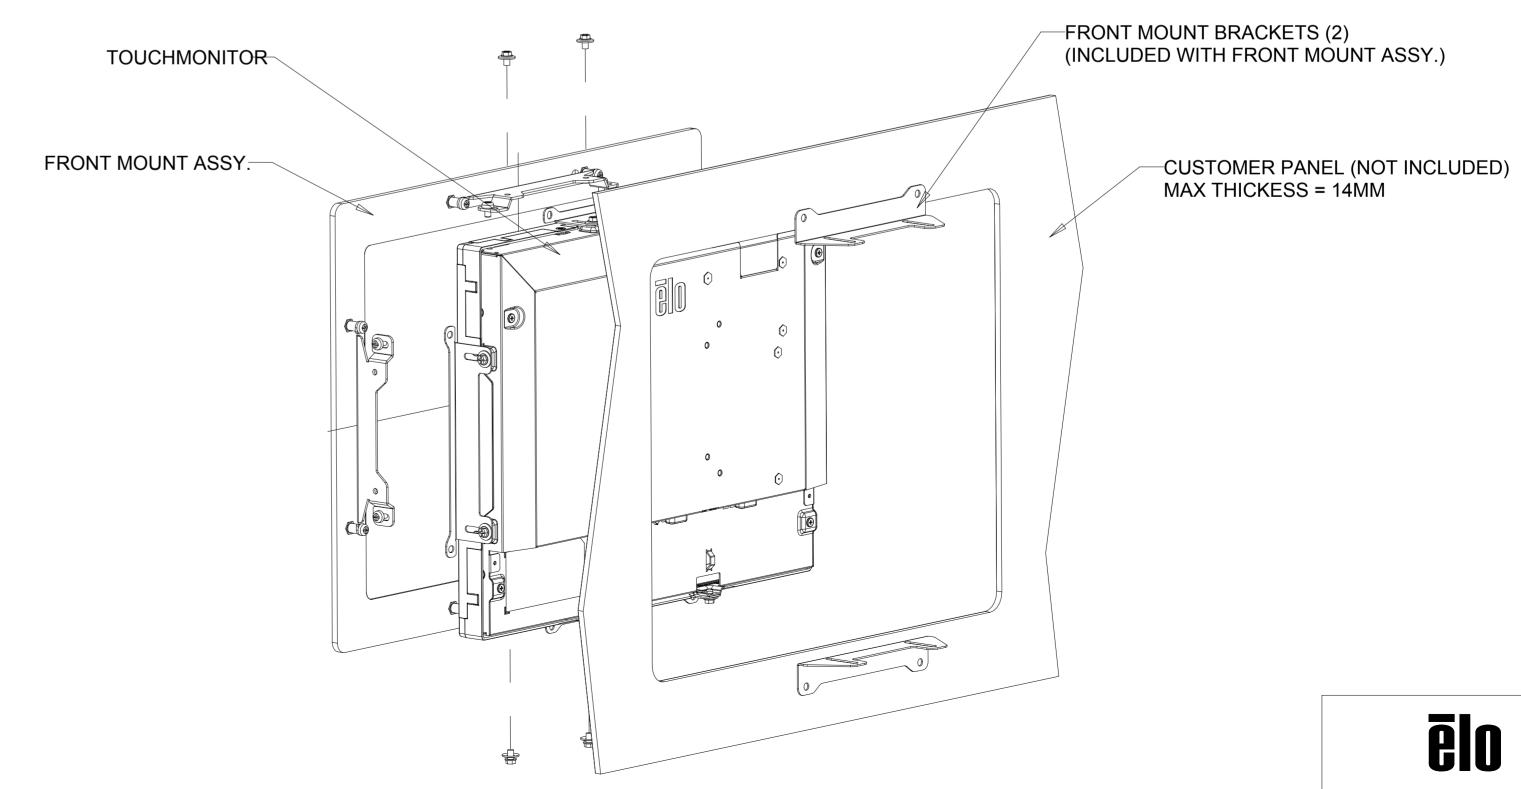

MS601689

RACK MOUNT OPTION P/N E295006 ORDERED SEPARATELY, CUSTOMER ASSEMBLED

