


PROJECTED CAPACITIVE MODEL

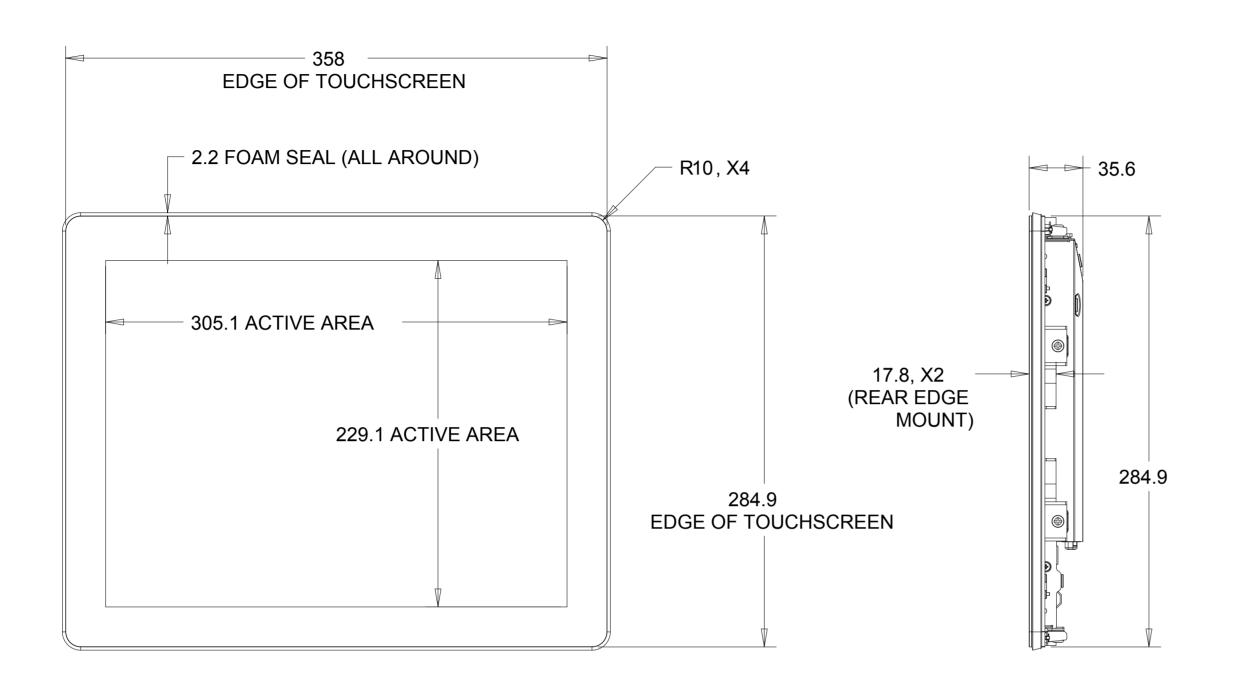

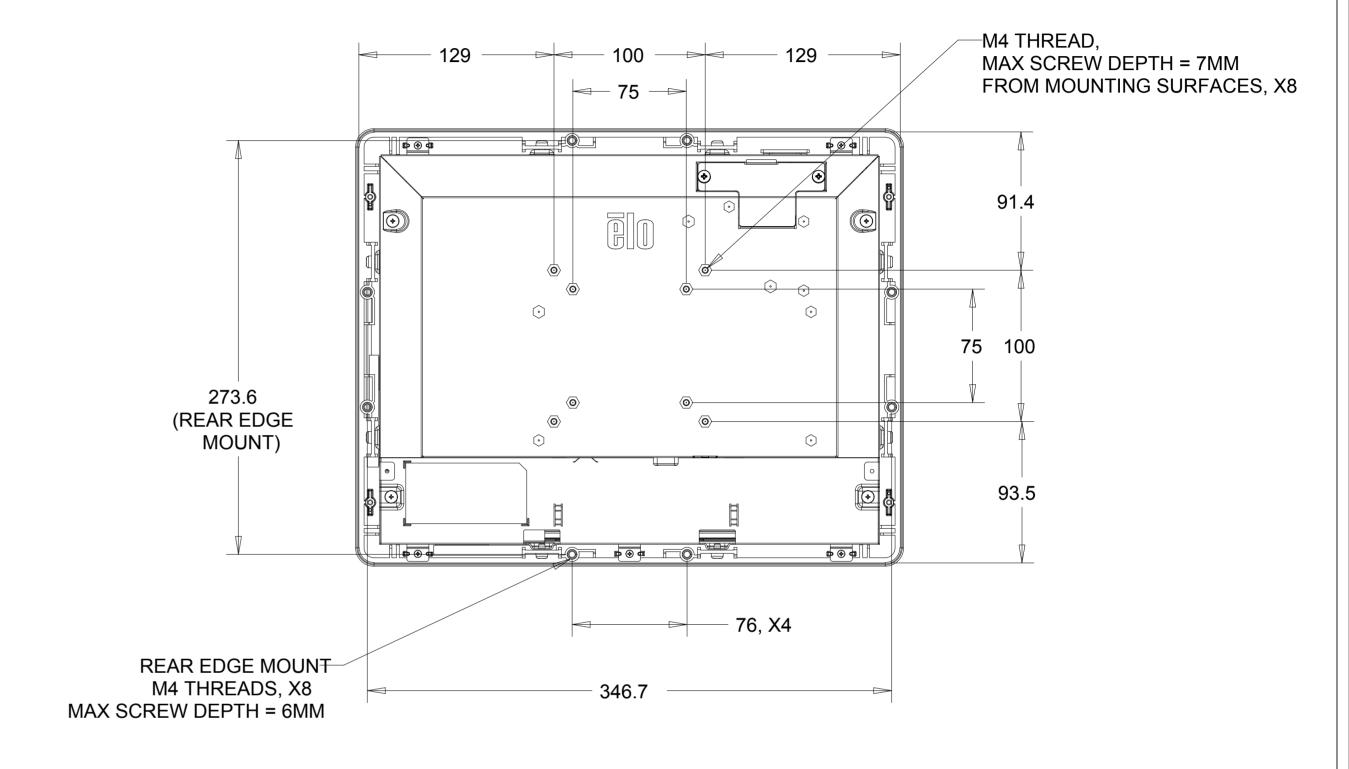


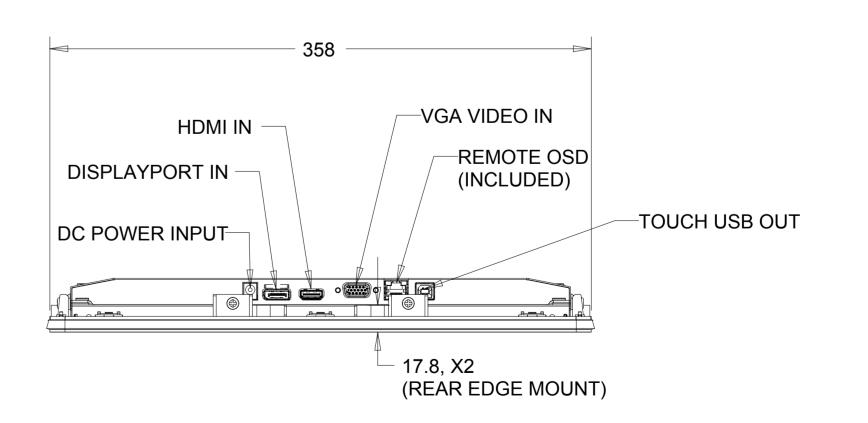

REV: B

PROJECTED CAPACITIVE MODEL

WITH FLUSH MOUNTING BRACKETS (4 SETS INCLUDED) REPLACEMENT BRACKET KIT P/N E139556 AVAILABLE SEPARATELY

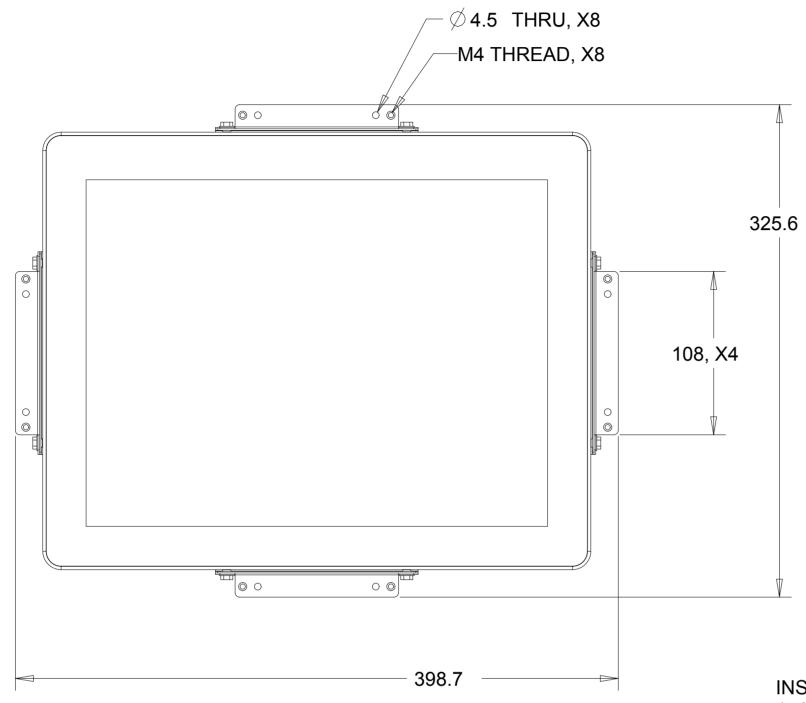

++

RECOMMENDED CUSTOMER PANEL CUT-OUT

"A" = M4 THREADED HOLES OR M4 CONCEALED

78 "A"

361.7±0.4


384.8


HEAD THREADED STUDS WITH NUTS

"B" = CLEARANCE HOLES FOR M4 SCREWS

- R11.8 ± 0.3 , X4


CHOOSE ONE:

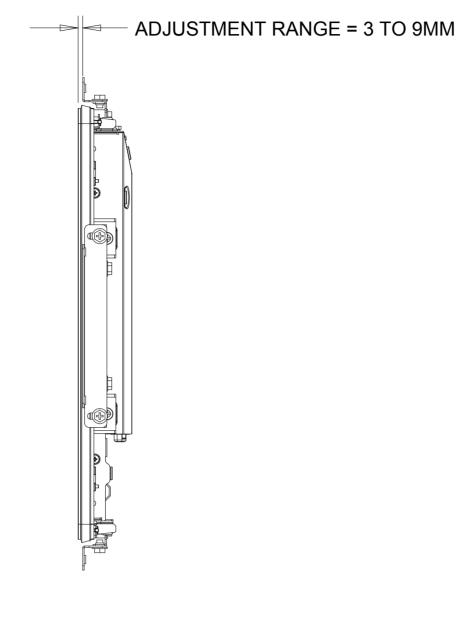


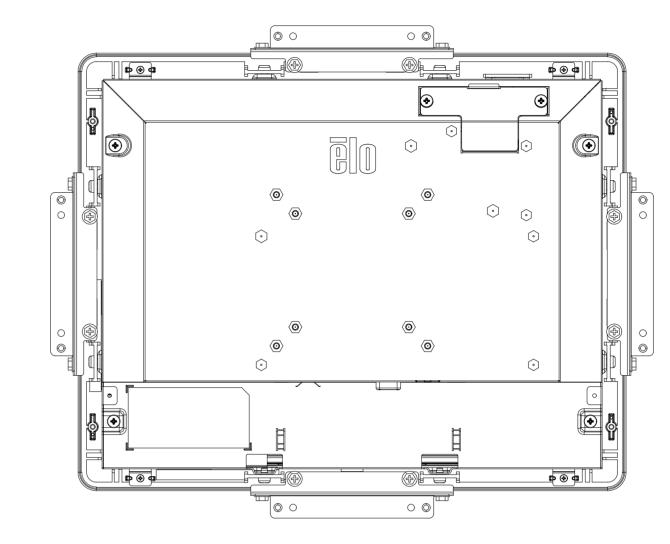



- 1. ATTACH BRACKET "A" TO CUSTOMER PANEL (ALL FOUR SIDES) WITH INCLUDED SCREWS
- 2. ATTACH BRACKET "B' TO TOUCHMONITOR (ALL FOUR SIDES)
- 3. PLACE TOUCHMONITOR INTO CUSTOMER PANEL OPENING,
 TAKING CARE NOT TO DAMAGE FOAM SEAL
- 4. ADJUST DEPTH OF BRACKETS "B" SO THE MONITOR IS FLUSH WITH CUSTOMER PANEL
- 5. SECURE TOUCHMONITOR TO BRACKET "B" FROM BEHIND WITH INCLUDED SCREWS

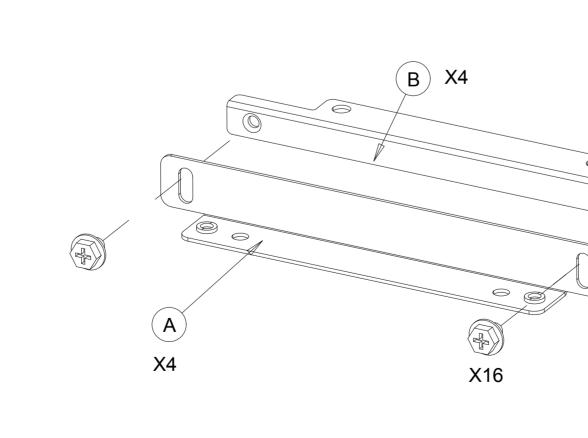

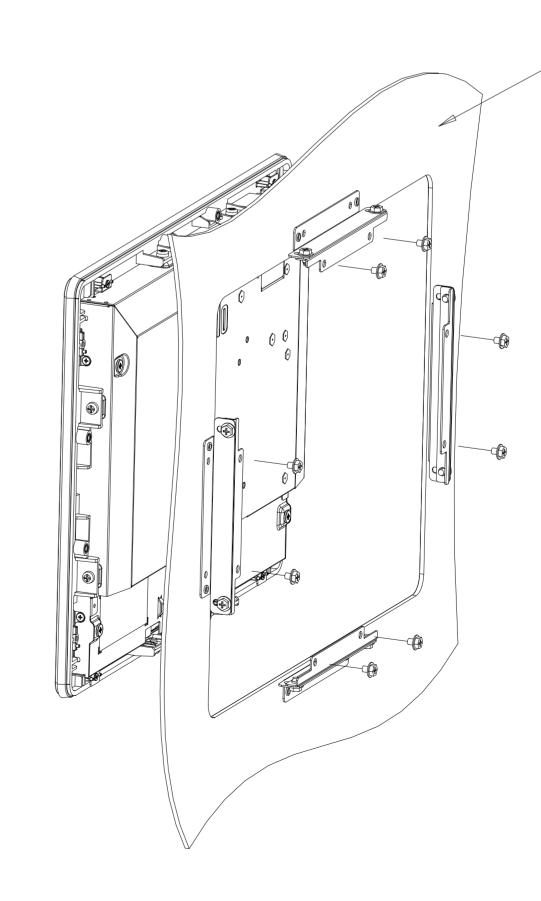

CUSTOMER PANEL (NOT INCLUDED)
MIN THICKNESS = 3MM
MAX THICKNESS = 12MM

ēlo


311.6


288.6±0.4


98 "B"


93.9


78 "A"

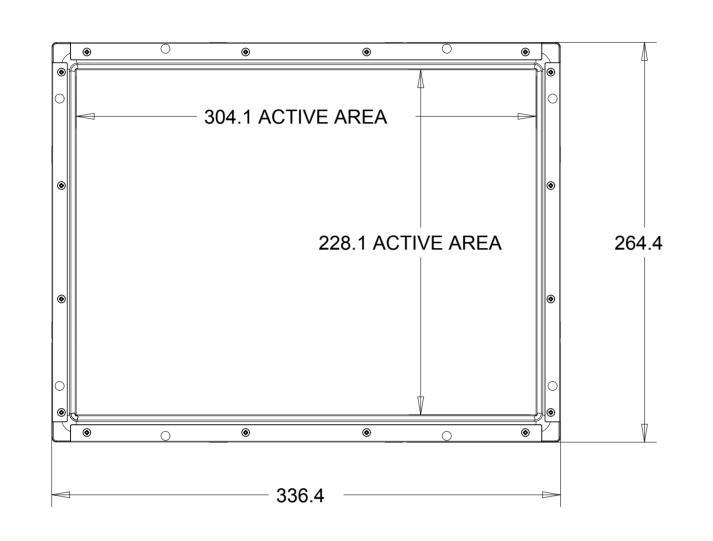

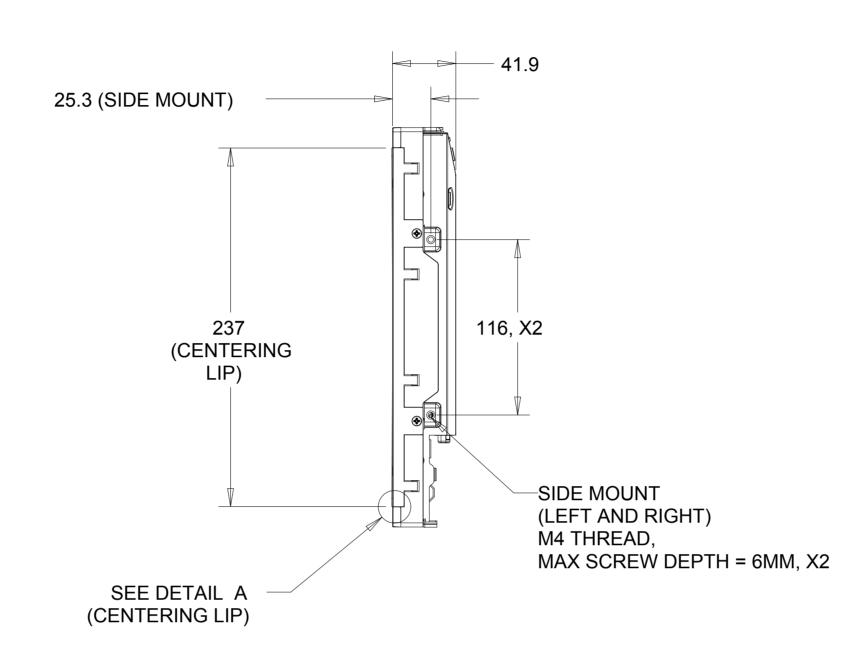


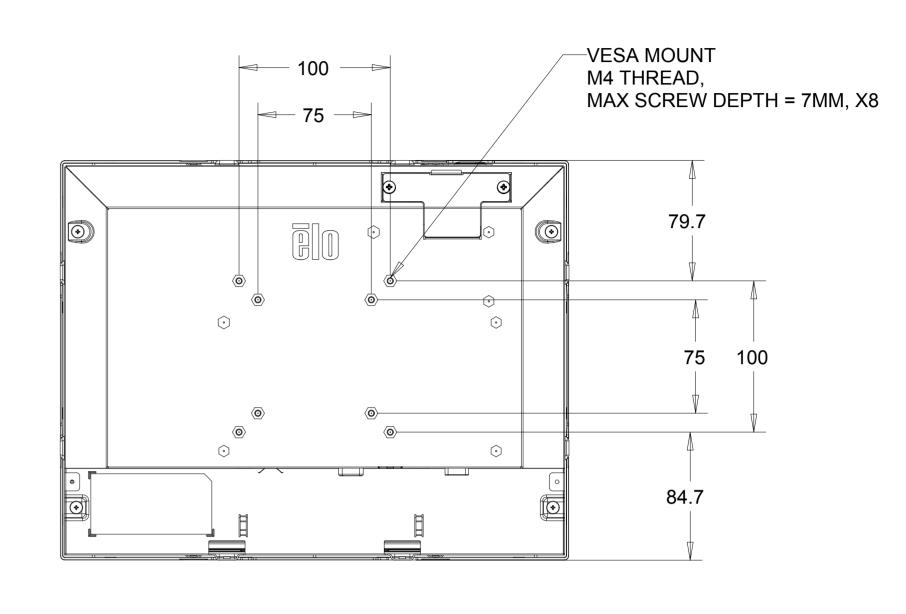


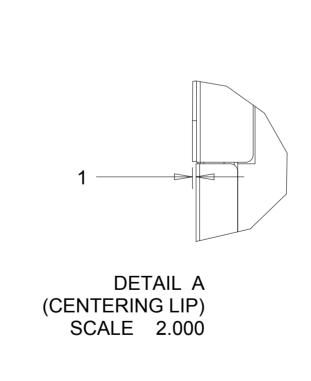


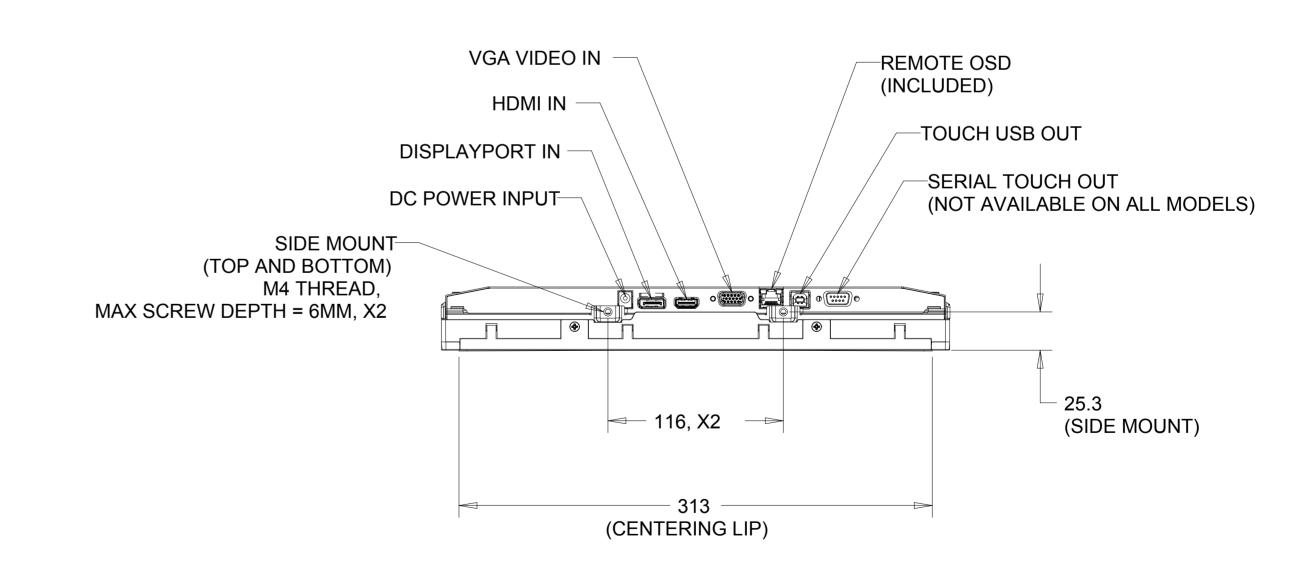

WITH SIDE MOUNTING BRACKETS (2 INCLUDED) REPLACEMENT BRACKET KIT P/N E203787 AVAILABLE SEPARATELY

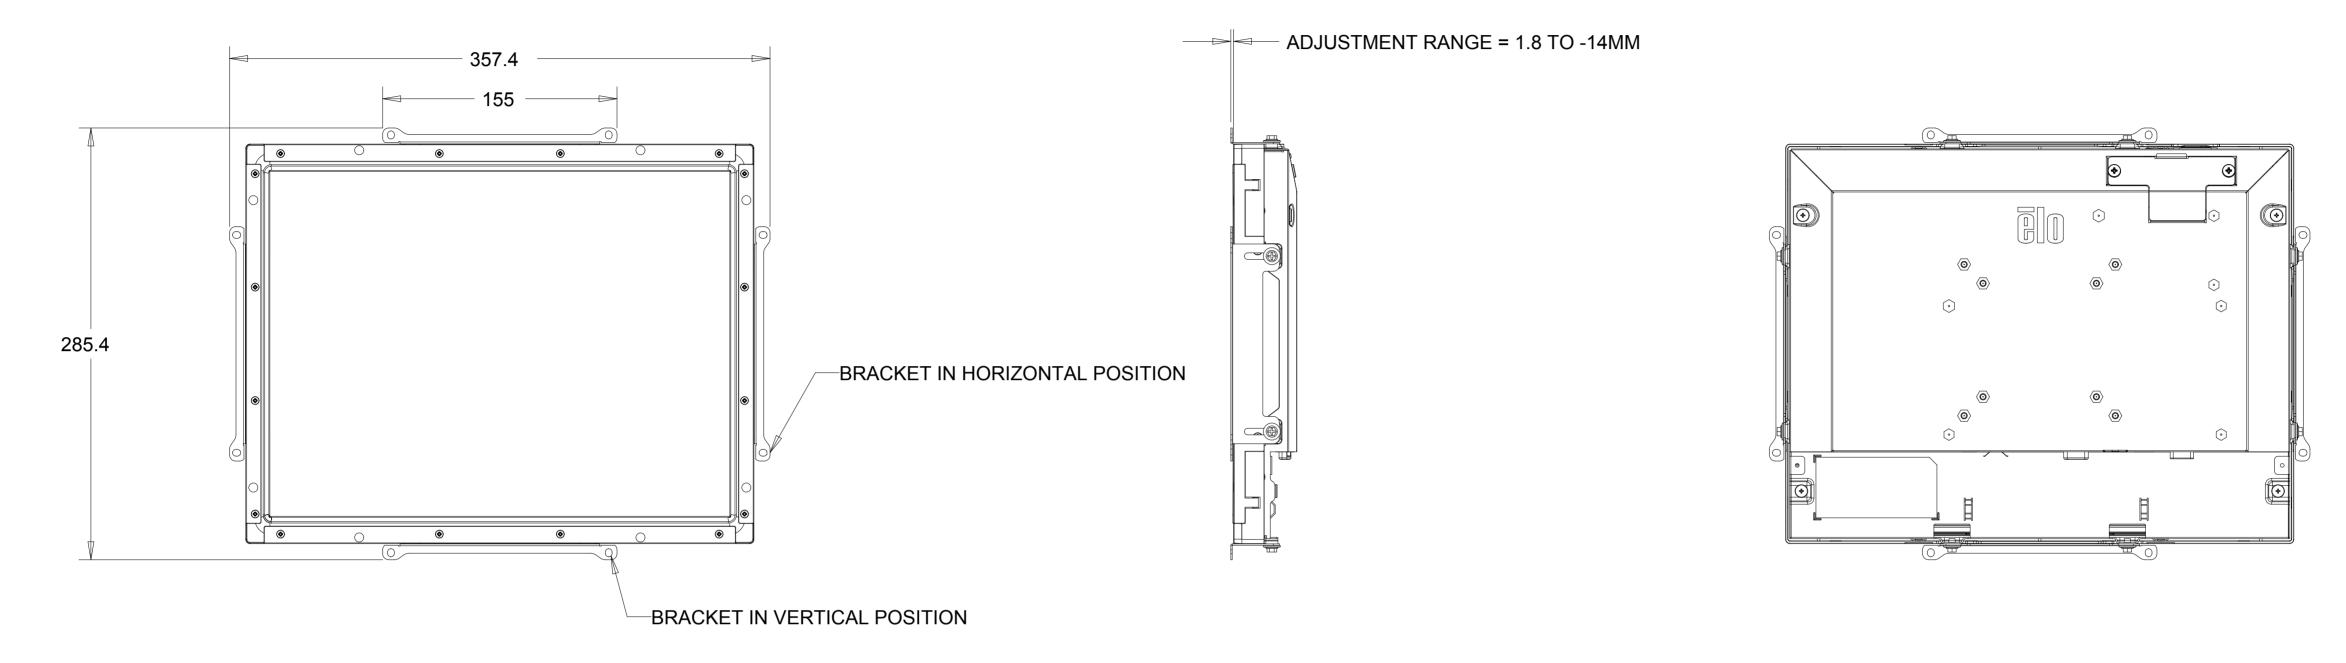

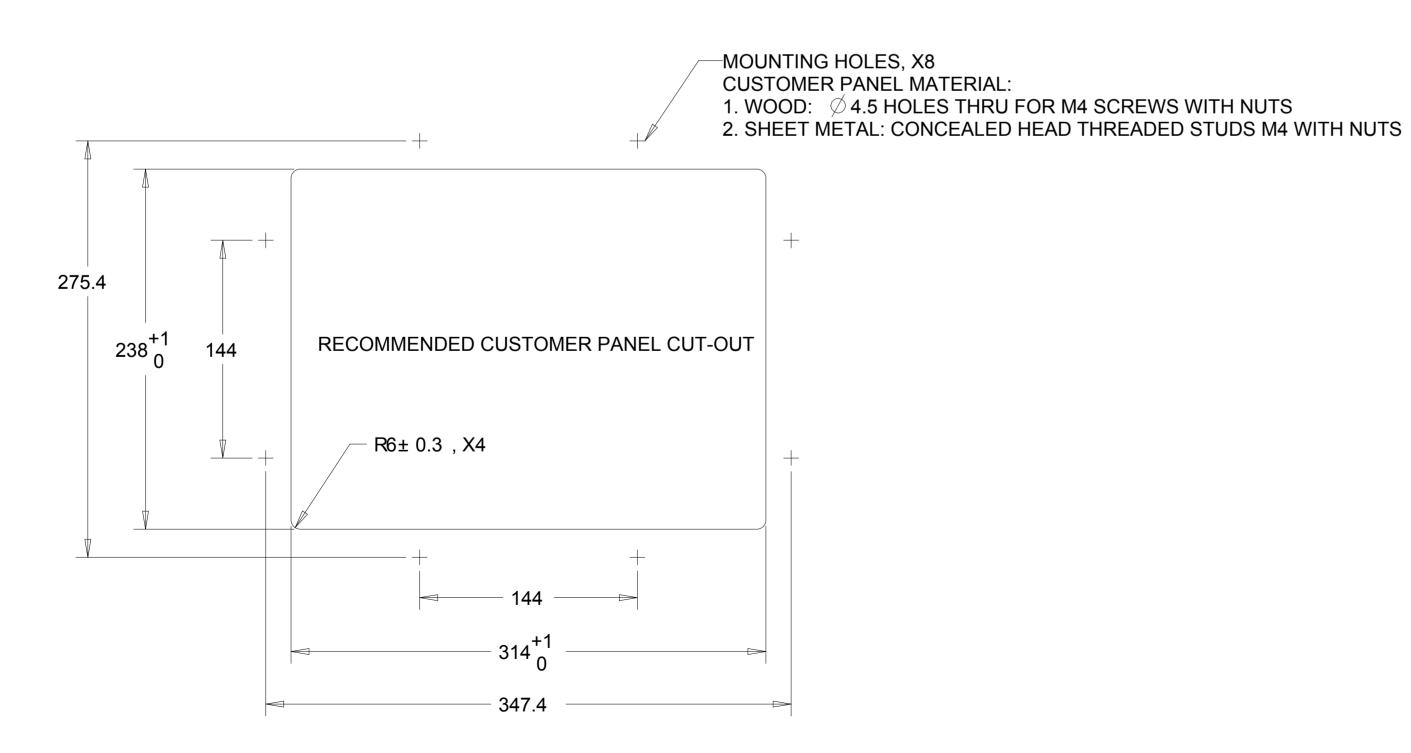

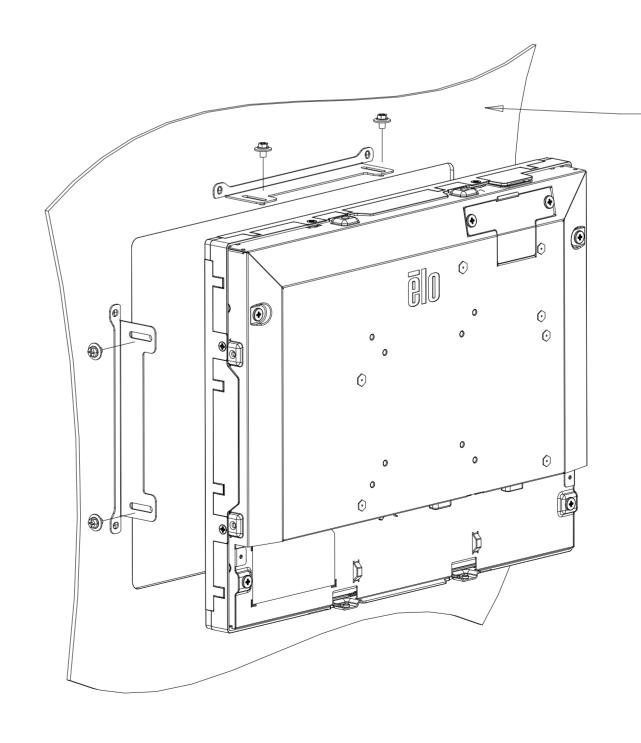



-CUSTOMER PANEL (NOT INCLUDED)
MIN THICKNESS = 1MM
MAX THICKNESS = 14MM

ēlo


REV: B


FRONT MOUNT OPTION P/N E323425 ORDERED SEPARATELY, CUSTOMER ASSEMBLED

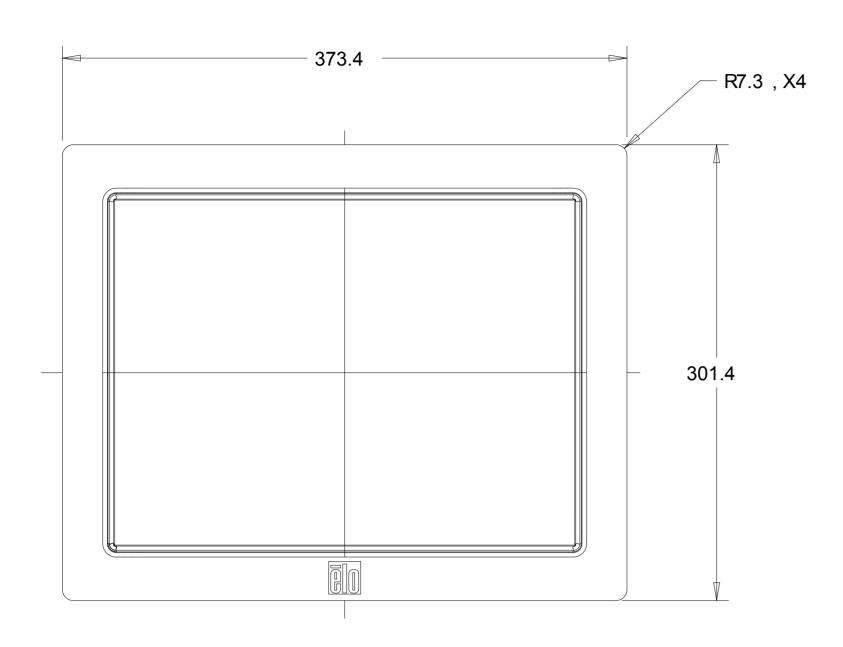

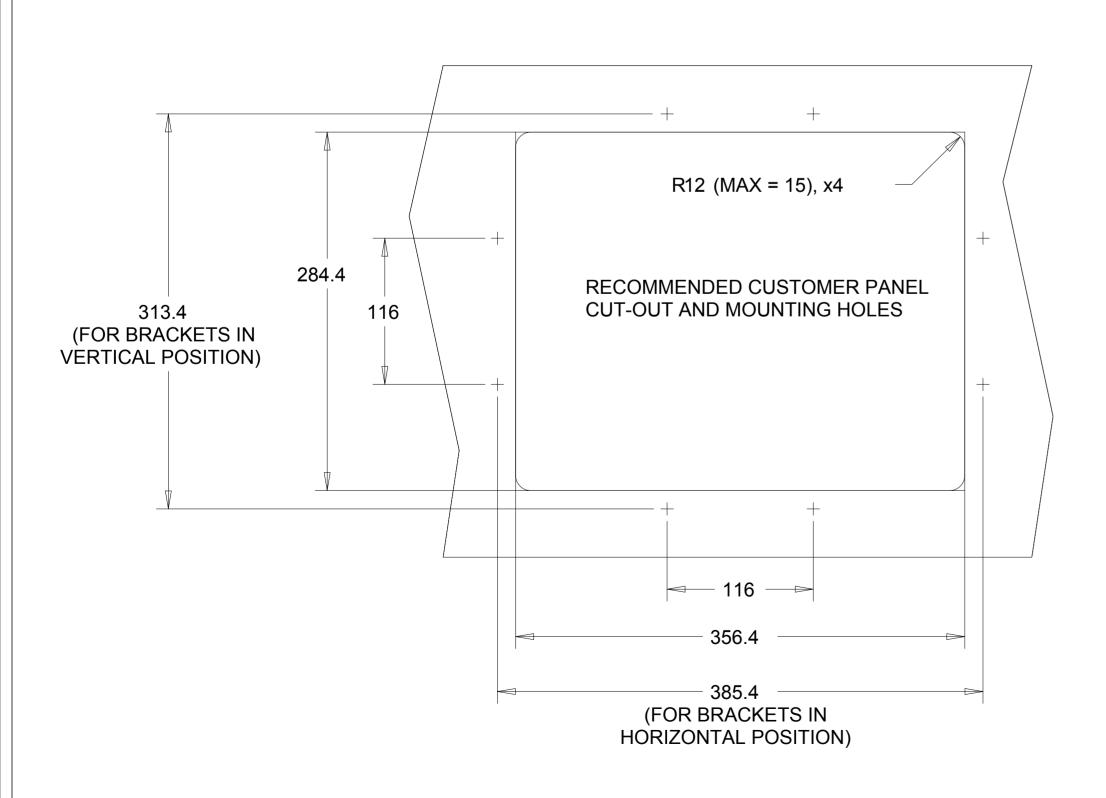

DIMENSIONS ARE IN MILLIMETERS

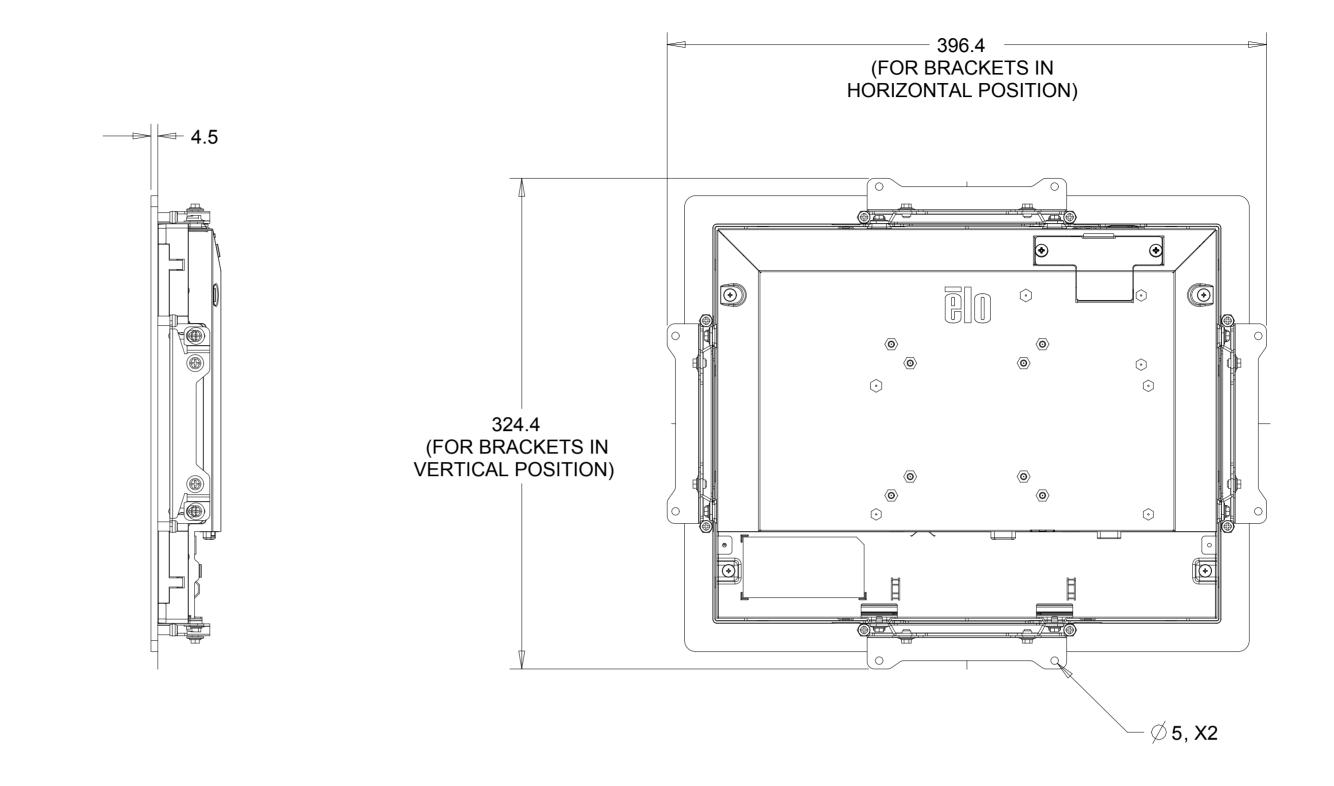

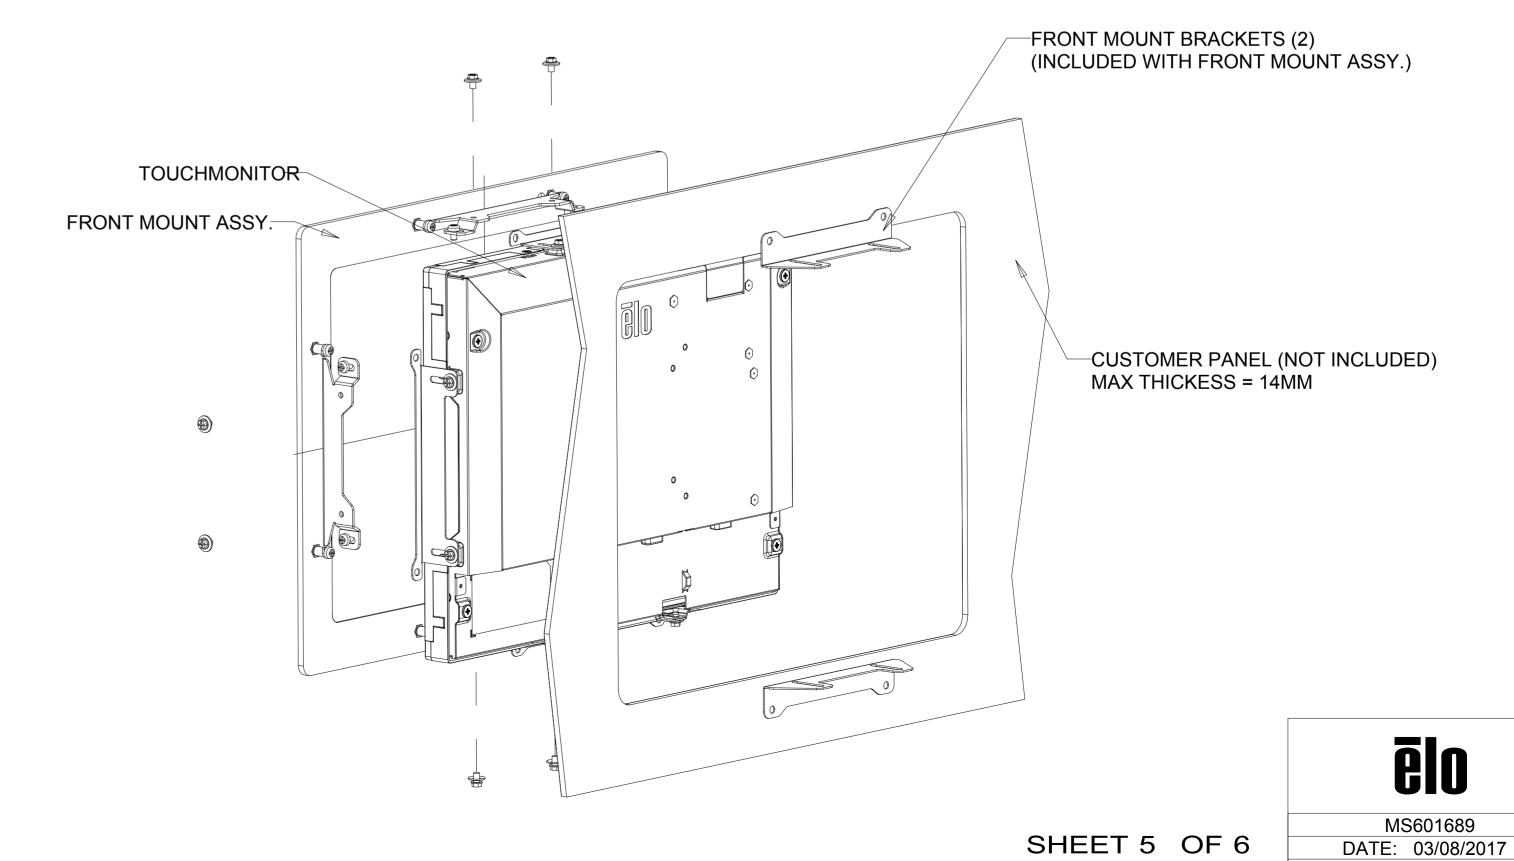

REV: B

RACK MOUNT OPTION P/N E295006 ORDERED SEPARATELY, CUSTOMER ASSEMBLED

