USED ON E411342

DWG NO MS601397

THIS DRAWING IS A CONTROLLED DOCUMENT.

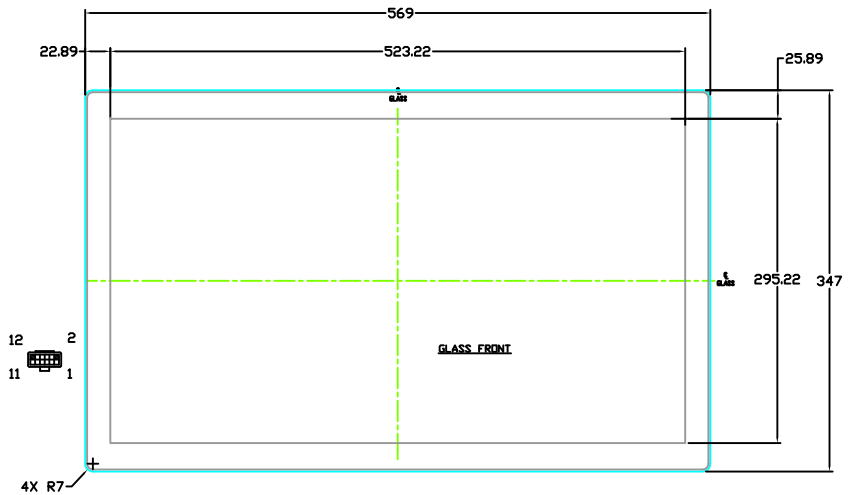

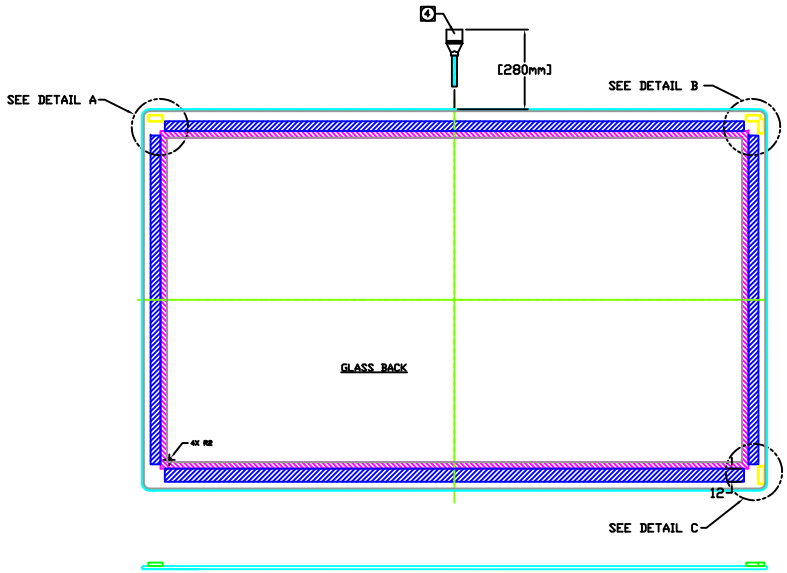

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (−)	BLK	BLK
6	Y TRANSMIT (−)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (−)	RED	RED
9	X RECEIVE (−)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		



DETAIL A
SCALE 2:1

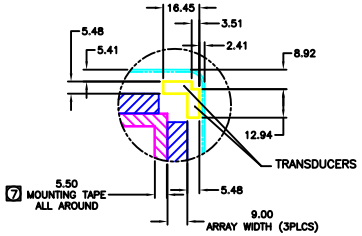

DETAIL B
SCALE 2:1



DETAIL C
SCALE 2:1

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. GLASS THICKNESS: 2.8mm (CLEAR FINISH)
3. TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. HEIGHT OF TRANSDUCER BELOW GLASS SURFACE: 3.2mm MAX.
4. BERG 65043−031, 2x6 HOUSING WITH BERG 48239−000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:
   > INTELLITOUCH SERIAL CONTROL BOARD
   > 012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
5. CABLE IS LOOSE (TAIL LENGTH 280mm)
6. SCREEN IS DESIGNED TO FIT INTO A 23.6" WIDE FORMAT LCD DISPLAY (16:9 ASPECT RATIO).
7. MOUNTING TAPE: 3M VHB 4920, 5mm WIDE x .4MM THK, TO BE APPROXIMATELY CENTERED IN THE MOUNTING AREA.

P	LTR	REVISION RECORD	DATE	DWN	APVD
	A	INITIAL RELEASE PER ECO−13−001546	01/09/13		

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± −
1 PLC ± −
2 PLC ± −
3 PLC ± −
4 PLC ± −

ANGLES± 5
SURFACE TEXTURE
CLEAR

DWN LEO	9/11/12	MATERIAL iTOUCH	HEAT TREAT N/A
CHK AV	01/09/13		
APVD LA	01/09/13		

NAME: DIMENSIONAL DRAWING
SCN−IT−FZW−23.6−001−020−R

SCALE	SIZE	DRAWING NO	SHEET	REV
1:1	A2	MS601397	1 OF 1	A

LOC 08
DIST 08

3307−7 (3/11)

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO ELO TOUCH SOLUTIONS, INC. AND ITS WORLDWIDE SUBSIDIARIES. IT MAY NOT BE REPRODUCED, USED, DISCLOSED OR EXPORTED WITHOUT AUTHORIZATION FROM ELO (www.ELOTOUCH.com).